
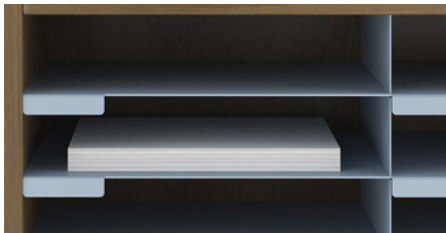


Accessories

Federal Government

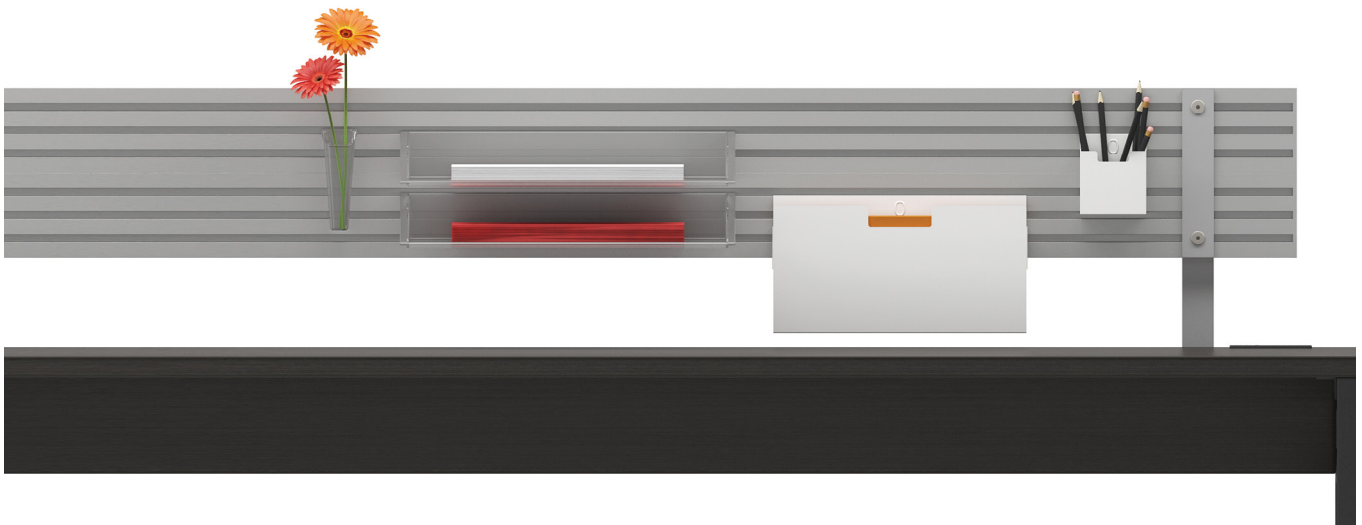

Organization & Complements - Electricity & Lighting - Ergonomics

CANADA
price list

Effective January 1st, 2015

updated - January 20th, 2025
update summary - p.80

Interactive Buttons



Main Table of Contents.



Go back to the page you previously viewed.



interactive links

index, page tabs & page references

– document optimized for dual pages view

Organization & complements	04
pigeonhole units	06
pencil trays and storage accessories	08
accessory bars	10
metal accessories	12
felt accessories	15
shelves	17
divider screens	23
markerboards	24
keys	24
hook and cushions	27
Electricity & lighting	30
wireless charger	32
multi-outlet – for conventional wall power outlet	33
1-circuit electrical system	
electrical components – 1-circuit Interlink Dean system	36
complements for electrical components	38
cable management	40
lighting	45
Ergonomiques	60
keyboard shelves	
retractable mechanism	62
"sit-stand" mechanism	65
pull-out	67
cpu holders	68
monitor arms	
surface mount	69
pole mounted	73
mounted on accessory bar	77
wall mounted	78

organization & complements





Organization & complements

pigeonhole units	06
pencil trays and storage accessories	08
accessory bars	10
metal accessories	12
felt accessories	15
shelves	17
divider screens	23
markerboards	24
keys	24
hook and cushions	27




Pigeonhole units - laminate

Pigeonhole unit - 11" deep. Sides and shelves made of 1/8" thick Thermally Fused Laminate (T.F.L.) with assorted edge banding. Depending on model, the pigeonhole can accommodate letter or legal size documents.



Dimensions				Code	Price	Spec.	
A	B	C	Spaces			Cu.Ft.	lb
LEGAL SIZE PIGEONHOLE UNIT							
17	11	26	8	AC-Pi111726-L	454	3.5	48
17	11	20	6	AC-Pi111720-L	415	2.8	37
17	11	15	4	AC-Pi111715-L	379	2.4	20
17	11	11	3	AC-Pi111711-L	358	1.9	16
LETTER SIZE PIGEONHOLE UNIT							
14	11	26	8	AC-Pi111426-L	377	2.5	37
14	11	20	6	AC-Pi111420-L	341	2.0	28
14	11	15	4	AC-Pi111415-L	340	2.0	17
14	11	11	3	AC-Pi111411-L	316	1.6	13

To store binders or other rigid documents.



Dimensions				Code	Price	Spec.	
A	B	C	D			Cu.Ft.	lb
VERTICAL PIGEONHOLE UNIT							
7	11	26	12	AC-Pi110726-L	244	1.6	18
7	11	20	12	AC-Pi110720-L	208	1.2	14

S SPECIFY

Code

Laminate

 -


S Code: Consult the above product code list.

Laminate: Specify the color of the pigeonhole. Refer to the current Artopex laminate finish card.



Pigeonhole units - metal shelves

Pigeonhole units with metal shelves - 16" deep.
Frame made of 1/4" thick Thermally Fused Laminate (T.F.L.).
Metal shelves with 2 1/2" long identification tabs.
Vertical space between shelves is 2 1/2" H.
Can accommodate letter or legal size documents.

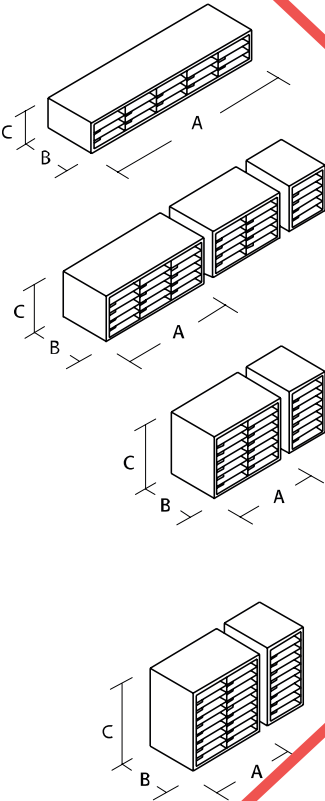

Dimensions				Code	Price	Spec.	
A	B	C	Spaces			Cu.Ft.	lb
9" H.							
60	16	9	15	PiM166009-L	987	5.5	75
14" H.							
32	16	14	15	PiM163214-L	968	4.6	62
24	16	14	10	PiM162414-L	782	3.4	46
12	16	14	5	PiM161214-L	514	1.7	23
19" H.							
24	16	19	14	PiM162419-L	1006	4.6	63
12	16	19	7	PiM161219-L	626	2.3	31

Dimensions				Code	Price	Spec.	
A	B	C	Spaces			Cu.Ft.	lb
24" H.							
24	16	24	18	PiM162424-L	1208	5.9	79
12	16	24	9	PiM161224-L	739	2.9	40

S SPECIFY

Code Laminate Metal
AC - - -

S Code: Consult the above product code list.

Laminate: Specify the color of the pigeonhole. Refer to the current Artopex laminate finish card.

Metal: Specify the color, refer to the current Artopex enamels finish card.




Pencil trays

Rectangular pencil tray, pull-out

1 space: 18 1/2" x 11" for letter, legal or tabloid size documents.

1 compartment for pencils and 3 smaller compartments.

Plastic, Black finish. Total thickness: 2"




Dimensions		Code	Price	Spec.	
A	B			Cu.Ft.	lb
16	21	AC-ACPDS	129	0.5	3

Round pencil tray

360° pivoting.

Plastic, Black finish.




Dimensions		Code	Price	Spec.	
A	B			Cu.Ft.	lb
8	9	AC-ACPD10809	37	0.3	3

Storage accessories

Lateral filing bar (letter size)


Included with all desks and combined storage units with 9" or 12" file drawers.
Must be ordered separately for suspended, freestanding and mobile pedestals.



Dimensions			Code	Price	Spec.	
A					Cu.Ft.	lb
12	for 15 5/8" wide pedestal		BL12	21	0.1	1
9	for 12" wide pedestal		BL09	20	0.1	1

Front-to-back filing bars for lateral filing cabinets


Pack of two, Black finish.



Dimensions			Code	Price	Spec.	
A					Cu.Ft.	lb
15			BL15	35	0.1	1

Recycling bin


Can be installed in any file drawer.
For use with letter and legal sized paper.
Made of blue HDPE.



Dimensions			Code	Price	Spec.	
A	B	C			Cu.Ft.	lb
15 1/2	12 1/4	8 1/2	AREC	61	0.3	2

Metal storage case

Metal storage case for binders or books. Installs under a work surface, with screws.
Specify the finish.



Dimensions			Code	Price	Spec.	
A	B	C			Cu.Ft.	lb
12	7 1/2	12	ASUB	197	0.8	5

S SPECIFY

Code Metal
AC - -

S Code: Consult the above product code list.
Metal (ASUB): Specify the color, refer to the current Artopex enamels finish card.

Accessory bars




Single or double accessory bars

Installs on a work surface (1" - 1 1/2" - 2"), a Take Off credenza or certain storage unit (from underneath).

Can hold (on both sides) Artopex accessories, [see p.12 to 14](#).

Can not accomodate a flat screen monitor support arm.

Anodized Aluminum bar and Silver finish metal supports.



IMPORTANT:

Refer to the corresponding product price list on which the accessory bar will be installed for restrictions that may apply.


Dimensions		Code	Price	Spec.	
A	B			Cu.Ft.	lb
SINGLE					
8	72	AC-VABS0872	388	0.5	12
8	66	AC-VABS0866	381	0.5	11
8	60	AC-VABS0860	374	0.4	10
8	54	AC-VABS0854	296	0.4	10
8	48	AC-VABS0848	289	0.4	9
8	42	AC-VABS0842	273	0.3	8
8	36	AC-VABS0836	263	0.3	7
8	30	AC-VABS0830	260	0.3	7
8	24	AC-VABS0824	253	0.2	6
DOUBLE					
12	72	AC-VABD1272	485	0.9	22
12	66	AC-VABD1266	471	0.8	21
12	60	AC-VABD1260	446	0.7	19
12	54	AC-VABD1254	381	0.7	18
12	48	AC-VABD1248	366	0.6	16
12	42	AC-VABD1242	343	0.6	15
12	36	AC-VABD1236	330	0.5	13
12	30	AC-VABD1230	317	0.4	12
12	24	AC-VABD1224	307	0.4	10

Accessory bars (cont'd)

Wall-mount accessory bar - 4"

Installs on any vertical laminate surface or to the wall with screws, not included.

Choose installation height according to accessories sizes.



Dimensions		Code	Price	Spec.	
A	B			Cu.Ft.	lb
70	4	ACBM7004	273	0.5	7
64	4	ACBM6404	255	0.4	6
58	4	ACBM5804	241	0.4	6
52	4	ACBM5204	230	0.4	5
46	4	ACBM4604	214	0.3	5
40	4	ACBM4004	199	0.3	4
34	4	ACBM3404	186	0.2	4
28	4	ACBM2804	172	0.2	3
22	4	ACBM2204	160	0.2	2

S SPECIFY

Code Metal

AC - -

S Code: Consult the above product code list.

Metal: Specify the color, refer to the current Artopex enamels finish card.



Metal accessories


The metal accessories are designed to be hooked on to accessory bars or rails of Artopex panels.

They can sit on a surface and for certain accessories, it is possible to hook a second on to the first to maximize storage space.

Horizontal tray

Horizontal tray for legal size paper.

Can be hooked on to the accessory bar or stacked on a surface. Interior available space: 1 3/4" H. when stacked.




Dimensions		Code	Price	Spec.	
A	B			Cu.Ft.	lb
9	15 1/2	ASMLG	55	0.4	3

Vertical tray


Vertical file tray for letter or legal size paper.

Can be hooked on to the accessory bar and a second file tray can be hooked onto the first.



Dimensions			Code	Price	Spec.	
A	B	C			Cu.Ft.	lb
LETTER SIZE						
1 ¾	12	6 ½	ASMLT	61	0.3	3
LEGAL SIZE						
1 ¾	15 ½	6 ½	ASMLG	66	0.3	3

Stationary holder



Dimensions		Code	Price	Spec.	
A	B			Cu.Ft.	lb
4	9	ASMPAP	41	0.3	2

S SPECIFY

Code Metal
AC - -


S Code: Consult the above product code list.

Metal: Specify the color, refer to the current Artopex enamels finish card.

Metal accessories (cont'd)

Pencil holder


A second holder can be hooked onto the first.



Dimensions			Code	Price	Spec.	
A	B	C			Cu.Ft.	lb
1 3/4	3	3 3/4	ASMPE	37	0.1	2

Cell phone holder


A cut-out holds the phone wire.



Dimensions			Code	Price	Spec.	
A	B	C			Cu.Ft.	lb
7/8	3 1/8	6 3/4	ASMCEL	31	0.1	1

Business card holder


Reversible to sit on a surface.



Dimensions			Code	Price	Spec.	
A	B				Cu.Ft.	lb
2	3 3/4		ASMBC	25	0.1	1

Brochure / flyer holder

For use on a surface only.



Dimensions			Code	Price	Spec.	
A	B	C			Cu.Ft.	lb
3	8 1/2	5	ASMFH	50	0.3	1

S SPECIFY

Code Metal
AC - -


S Code: Consult the above product code list.

Metal: Specify the color, refer to the current Artopex enamels finish card.


Metal accessories (cont'd)

Storage box

For use on a surface only, stackable.



Dimensions			Code	Price	Spec.	
A	B	C			Cu.Ft.	lb
8	8	6	ASMBOX	55	0.3	3

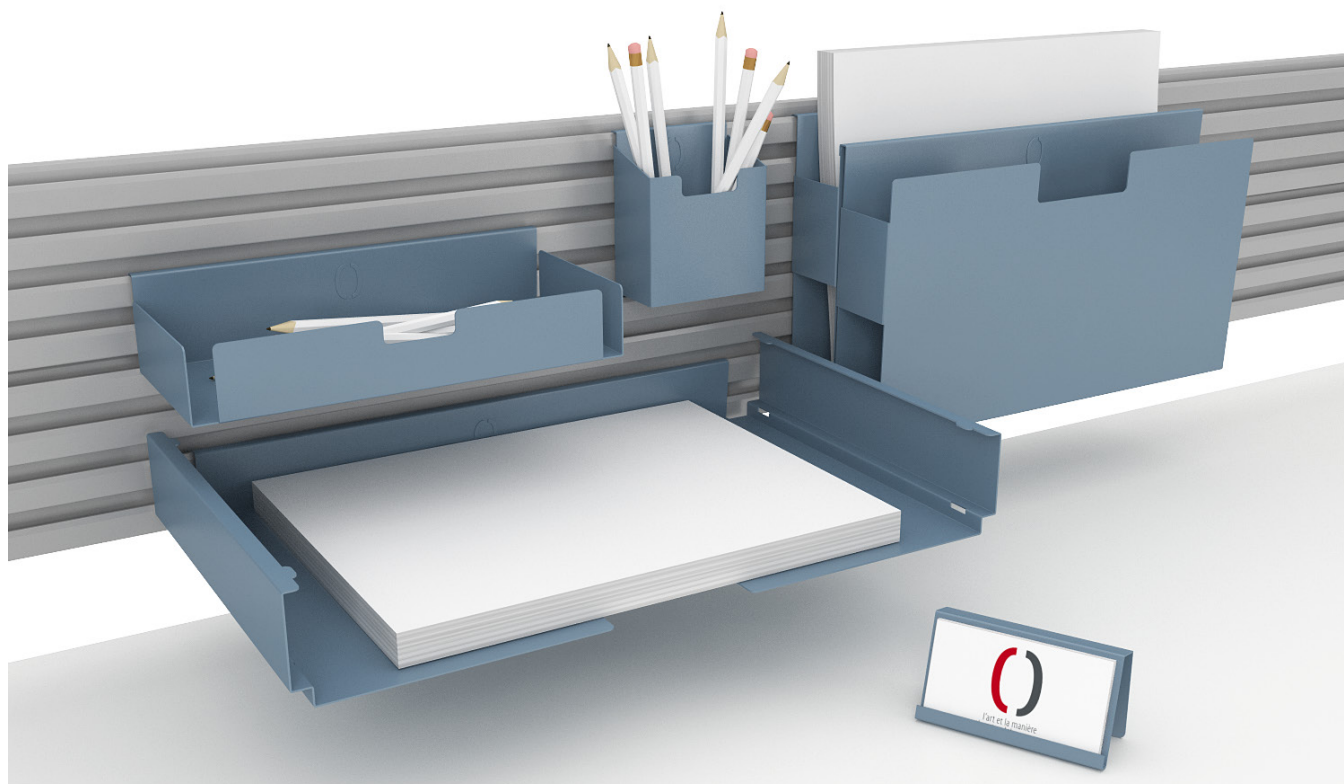

S SPECIFY

Code Metal
AC - -

S **Code:** Consult the above product code list.


Metal: Specify the color, refer to the current Artopex enamels finish card.

Felt accessorie



Felt Cup


Multipurpose storage cup.
Made of molded felt.
Color: Storm (FE36).



Dimensions			Code	Price	Spec.	
A	B	C			Cu.Ft.	lb
3 ¾	3 ¾	4	MFC040404	45	0.1	1

Felt Basket


Multipurpose storage basket.
Made of molded felt.
Color: Storm (FE36).
Can be stored under a surface with the felt basket support.



Dimensions			Code	Price	Spec.	
A	B	C			Cu.Ft.	lb
6	8	2 ¾	MFB060803	55	0.1	1

Felt Tray

Multipurpose storage tray.
Made of molded felt.
Color: Storm (FE36).
Can be stored under a surface using the felt tray support.



Dimensions			Code	Price	Spec.	
A	B	C			Cu.Ft.	lb
8	12	1 ½	MFT081202	68	0.1	1

S SPECIFY

Code Felt
AC - - FE36

S Code: Consult the product code above.


Felt accessories (cont'd)

NEW

Felt Basket Support

Attaches underneath a surface.

*Felt Basket sold separately.




Dimensions			Code	Price	Spec.	
A	B	C			Cu.Ft.	lb
6	10	3 ¾	MSSB061004	76	0.5	1

Felt Tray Support

Attaches underneath a surface.

*Felt Tray sold separately.



Dimensions			Code	Price	Spec.	
A	B	C			Cu.Ft.	lb
8	14	2 ½	MSST081403	95	0.8	2

S SPECIFY

Code Metal
AC - -

S Code: Consult the above product code list.

Metal: Specify the color, refer to the current Artopex enamels finish card.




1 1/16" shelves & bookends

1/16" thick shelves

Installs on the accessory bar or the accessory rail of Air line, Nano or Take Off series and work walls.

Laminate finish with assorted edge banding.

Supports included, anodized aluminum finish.



Dimensions			Code	Price	Spec.	
A	B	C			Cu.Ft.	lb
10" DEEP						
10	72	3	SHE1072-L	233	0.9	13
10	66	3	SHE1066-L	222	0.9	12
10	60	3	SHE1060-L	211	0.8	11
10	54	3	SHE1054-L	168	0.7	10
10	48	3	SHE1048-L	157	0.6	9
10	42	2	SHE1042-L	143	0.5	8
10	36	2	SHE1036-L	133	0.5	7
10	30	2	SHE1030-L	119	0.4	6
10	24	2	SHE1024-L	108	0.3	4
10	21	2	SHE1021-L	103	0.3	4
10	18	2	SHE1018-L	95	0.2	3

C: Number of supports included



IMPORTANT:

Do not install 10" or 13" deep shelves on to an accessory bar attached to a work surface or on the Air line panel of the electrical unit. Cannot be attached above either a tackboard or an acrylic section in the Nano series.

S SPECIFY

Code Laminate
AC - - - O

S Code: Consult the above product code list.

Laminate: Specify the color of the storage. Refer to the current Artopex laminate finish card.


1 1/16" shelves & bookends (cont'd)

1 1/16" thick shelves

Installs on the accessory bar or the accessory rail of Air line, Nano or Take Off series and work walls.

Laminate finish with assorted edge banding.

Supports included, anodized aluminum finish.



Dimensions			Code	Price	Spec.	
A	B	C			Cu.Ft.	Lb
6" DEEP						
6	72	3	SHE0672	163	0.6	8
6	66	3	SHE0666	156	0.5	7
6	60	3	SHE0660	149	0.5	7
6	54	3	SHE0654	121	0.4	6
6	48	3	SHE0648	113	0.4	5
6	42	2	SHE0642	103	0.4	5
6	36	2	SHE0636	95	0.3	4
6	30	2	SHE0630	90	0.3	3
6	24	2	SHE0624	84	0.2	3
6	21	2	SHE0621	80	0.2	2
6	18	2	SHE0618	76	0.2	2

C: Number of supports included



IMPORTANT:

Do not install 10" or 13" deep shelves on to an accessory bar attached to a work surface or on the Air line panel of the electrical unit. Cannot be attached above either a tackboard or an acrylic section in the Nano series.

S SPECIFY


Code Laminate
AC - - - O

S Code: Consult the above product code list.

Laminate: Specify the color of the storage. Refer to the current Artopex laminate finish card.

Bookends for 11/16" thick shelves

Metal, elliptical shape.
Pack of 2. Specify the finish.



		Code	Price	Spec.	
				Cu.Ft.	lb
For 13" shelf	pair	ASDM13	47	0.3	1
For 10" shelf	pair	ASDM10	44	0.2	1
For 6" shelf	pair	ASDM06	38	0.1	1

S SPECIFY

Code

Metal

NA5 - -

S Code:

Consult the above product code list.


Metal:

Specify the color, refer to the current Artopex enamels finish card.



1" shelves & bookends

Installs on the accessory bar or the accessory rail of Air line, Nano or Take Off series and work walls.
Laminate finish with assorted edge banding.
Supports included, Anodized Aluminum finish.

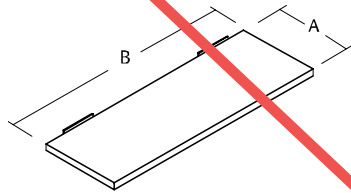

Dimensions			Code	Price	Spec.	
A	B	C			Cu.Ft.	lb
10" DEEP						
10	72	3	SHE1072-L1	217	1.6	18
10	66	3	SHE1066-L1	230	1.5	16
10	60	3	SHE1060-L1	218	1.4	15
10	54	3	SHE1054-L1	208	1.2	13
10	48	3	SHE1048-L1	197	1.1	12
10	42	2	SHE1042-L1	174	1.0	10
10	36	2	SHE1036-L1	166	0.8	9
10	30	2	SHE1030-L1	152	0.7	7
10	24	2	SHE1024-L1	144	0.6	6
6" DEEP						
6	72	3	SHE0672-L1	213	1.1	11
6	66	3	SHE0666-L1	206	1.0	10
6	60	3	SHE0660-L1	198	0.9	9
6	54	3	SHE0654-L1	191	0.8	8
6	48	3	SHE0648-L1	180	0.7	7
6	42	2	SHE0642-L1	161	0.7	6
6	36	2	SHE0636-L1	152	0.6	5
6	30	2	SHE0630-L1	142	0.5	4
6	24	2	SHE0624-L1	136	0.4	3

C: Number of supports included



IMPORTANT:

Do not install 10" deep shelves to an accessory bar attached to a work surface or on the Air line panel of the electrical unit. Cannot be attached above either a tackboard or an acrylic section in the Nano series.

S SPECIFY


Code Laminate
AC - -

S **Code:** Consult the above product code list.

Laminate: Specify the color of the storage. Refer to the current Artopex laminate finish card.

Bookends for 1" thick shelves

Metal, square shape.
Pack of 2. Specify the finish.



		Code	Price	Spec.	
				Cu.Ft.	lb
For 10" shelf	pair	ASDM10	43	0.1	1
For 6" shelf	pair	ASDM06	38	0.1	1

S SPECIFY

Code

Metal

TL - -

S


Code: Consult the above product code list.

Metal: Specify the color, refer to the current Artopex enamels finish card.



Frosted acrylic privacy panels with square anchoring brackets

Rectangular frosted acrylic privacy panel
 Installs on a surface with the included metal supports (nickel finish).
 Frosted acrylic on one side, 1/4" thick.




Dimensions			Code	Price	Spec.	
A	B	C			Cu.Ft.	lb
15	72	3	AC-VRGiS1572	757	1.0	13
15	66	3	AC-VRGiS1566	723	0.9	12
15	60	3	AC-VRGiS1560	688	0.9	11
15	54	2	AC-VRGiS1554	568	0.8	10
15	48	2	AC-VRGiS1548	535	0.8	9
15	42	2	AC-VRGiS1542	500	0.6	8
15	36	2	AC-VRGiS1536	468	0.5	7
15	30	2	AC-VRGiS1530	433	0.4	6
15	24	2	AC-VRGiS1524	401	0.4	5

C: Number of supports included

Divider screens

Divider screen - laminate.
Can be installed, permanently or not, on a 1" or 1 1/2" thick surface.
Laminate screen with assorted edge band.
Metal supports, specify the finish.



Dimensions			Code	Price	Spec.	
A	B	C			Cu.Ft.	lb
1" SURFACE						
11	25		AC-ASPSDL1125-L1	134	1.2	8
11	19		AC-ASPSDL1119-L1	130	0.9	7

S SPECIFY

Code

Laminate

Metal


-

-

S **Code:** Consult the above product code list.
Laminate (ASPSDL): Specify the color of the screen. Refer to the current Artopex laminate finish card.
Metal: Specify the color, refer to the current Artopex enamels finish card.

Markerboard

Magnetic white markerboard, installs (double-face tape included) to the back of a storage unit.
Glossy enamel finish to be used with a non-permanent marker (not included).



		Code	Price	Spec.	
A	B			Cu.Ft.	lb
13	22	AC-ASWBF	157	0.5	8

Standard keys

The master key allows to lock / unlock all standard Artopex locks.

The lock Barrel Key allows the insertion and removal of the lock barrel from an Artopex storage unit "Magic Key".


* The replacement key code (**AC-04-CLE**) must be followed by the lock barrel number.



	Code	Price
Master key	AC-04-M248	45
Lock barrel key	AC-04-CK248	43
Replacement key	AC-04-CLE*	14

Master key for noki electronic lock

Master key to unlock and reset the noki electronic lock to the default code 1-2-3.
Identical master keys (with identical serial numbers) unlock and reset one or several identical electronic locks.
* The additional master key code (AC-16-KBLK-S) must be followed by the serial number inscribed on the original master key (BN...).



	Code	Price
Master key	AC-16-KBLK-N	260
Additional master key	AC-16-KBLK-S*	260

S SPECIFY

Code

Identical keys

-

S Code: Consult the above product code list.
Identical keys (AC-16-KBLK-N): Specify "01" – REQUIRED – for the first key (or keys) ordered.
"01" keys will be inscribed with identical serial numbers.
Specify "02" for a key (or keys) with different serial numbers, "03" for another set, etc.


Hardware

Stiffeners

Suggested for work surface 54" or more, with a 1" thick surface.

Also suggested for work surface 72" or more, with a 1 ½" or 2" thick surface.


Metal, recycled gray paint finish. Installation hardware included.

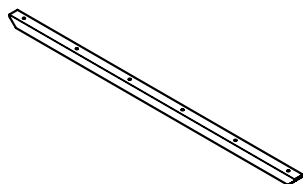

			Code	Price	Spec.	
	Lenght	Tube			Cu.Ft.	lb
For surfaces of 72" and more	64	1 ¼" x 1 ¼"	AC-RSTF64	112	2.0	1
For surfaces of 66"	58	1 ¼" x 1 ¼"	AC-RSTF58	101	2.0	1
For surfaces of 60"	52	1 ¼" x 1 ¼"	AC-RSTF52	94	2.0	1
For surfaces of 54"	46	1" x 1"	AC-RSTF46	87	2.0	1
For collaborative work surfaces of 48"	40	1" x 1"	AC-RSTF40	78	1.0	1
For surfaces with feet and freestanding pedestals	34	1" x 1"	AC-RSTF34	70	1.0	1

Junction bar

At the junction of 2 surfaces

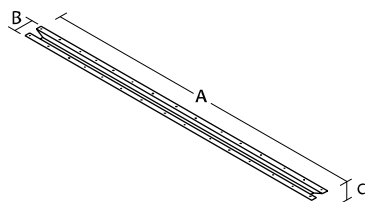


				Code	Price	Spec.	
A	B	C	Lenght			Cu.Ft.	lb
18	2	½	18	AC-RSTi18	50	0.1	1

Junction plates

Used to join 2 surfaces or 2 shelves side-by-side.

Metal, Black finish. Installation hardware included.




			Code	Price	Spec.	
					Cu.Ft.	lb
Pack of 2			AC-FJP2	24	0.1	1

Oversized junction plate

Used to join 2 work surfaces with reverse profile.

Dimensions: 4" x 8".

Metal, Charcoal finish. Installation hardware included.




			Code	Price	Spec.	
					Cu.Ft.	lb
1 junction plate			AC-FJP48	22	0.1	1


Locking ganging bracket

Used to join 2 mobile tables to create one surface.

Metal, Black finish. Sold individually.




			Code	Price	Spec.	
					Cu.Ft.	lb
1 locking bracket			AC-FLP	28	0.1	1

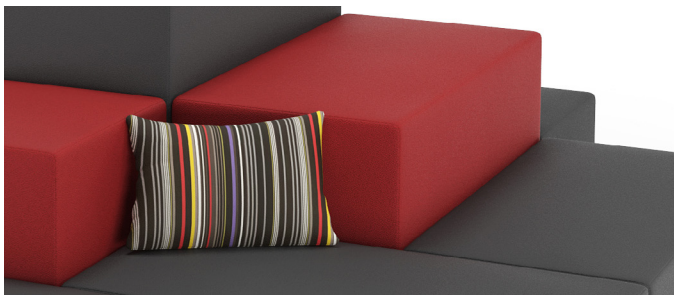

Hook

Metal hook screws under a surface for hanging bags or personal belongings.
Sold individually. Specify the finish.



Dimensions		Code	Price	Spec.	
A	B				
4 ½	2 ½	HKB	37	0.1	1


S SPECIFY

DW - Code - Metal

S Code: Consult the above product code list.
Metal: Specify the color, refer to the current Artopex enamels finish card.

Cushions

Made of polyurethane foam with a fabric cover sewn on all 4 sides.
Available in 3 sizes.



Dimensions		Code	Spec.		Fabric COM	
A	B		Cu.Ft.	lb	yd	m
12	18	CUSH1218	0.7	1	0.5	0.45
14	14	CUSH1414	0.6	1	0.5	0.45
12	12	CUSH1212	0.5	1	0.5	0.45

Price														
Code	Gr.A	Gr.1	COM / Gr.2	Gr.3	Gr.4	Gr.5	Gr.6	Gr.7	Gr.8	Gr.9	Gr.10	Gr.11	Gr.12	Leather
CUSH1218	113	124	134	145	159	170	184	196	210	224	236	261	286	271
CUSH1414	102	115	126	138	152	169	185	200	216	232	248	278	309	286
CUSH1212	92	100	110	122	135	147	161	174	186	200	212	238	264	243

S SPECIFY


Code Fabric
DW - -

S Code: Consult the above product code list.

Fabric: Specify the fabric, refer to Artopex chair fabric sample cards.

Cushions

Cushion for floor storage units and mobile pedestals. Rectangular or round style.
Installs with velcro. The cushion allows installation of supports on it's sides.

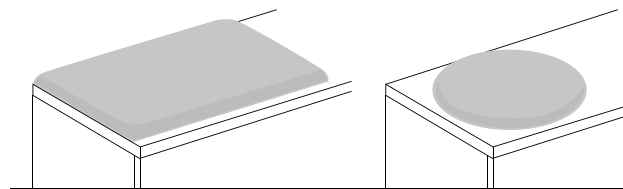

Dimensions			Spec.			Fabric COM	
A	B	C	Code	Cu.Ft.	lb	yd	m
17	72	1¾	CUS1772	1.8	18	2.25	2
17	66	1¾	CUS1766	1.8	16.5	2.1	1.9
17	60	1¾	CUS1760	1.8	15	1.9	1.75
17	54	1¾	CUS1754	1.3	13.5	1.75	1.6
17	48	1¾	CUS1748	1.3	12	1.55	1.45
17	42	1¾	CUS1742	1.3	10.5	1.4	1.3
17	36	1¾	CUS1736	0.9	9	1.25	1.15
17	30	1¾	CUS1730	0.9	7.5	1.1	1
17	24	1¾	CUS1724	0.9	6	0.9	0.85
17	17	1¾	CUS17RO	0.9	6	0.65	0.6
18	15	1¾	CUS1815	0.9	6	0.65	0.6

Price														
Code	Gr.A	Gr.1	COM / Gr.2	Gr.3	Gr.4	Gr.5	Gr.6	Gr.7	Gr.8	Gr.9	Gr.10	Gr.11	Gr.12	Leather
RECTANGULAIR														
CUS1772	662	644	700	755	823	891	961	1029	1098	1166	1236	1374	1511	1479
CUS1766	542	592	644	698	763	828	891	958	1024	1089	1154	1285	1414	1295
CUS1760	494	541	590	638	698	757	818	880	937	997	1058	1178	1298	1207
CUS1754	455	498	542	586	641	696	750	807	861	916	971	1081	1192	1105
CUS1748	391	431	471	512	560	612	660	709	760	810	860	959	1058	978
CUS1742	360	392	430	466	511	555	598	643	687	733	777	866	955	881
CUS1736	305	335	366	400	436	477	516	556	595	636	675	754	832	748
CUS1730	262	288	314	342	377	411	447	479	515	549	583	652	722	655
CUS1724	231	253	277	300	331	360	388	417	447	476	506	562	621	567
ROUND														
CUS17RO	189	206	223	239	261	279	301	321	342	363	384	425	467	423
FOR MOBILE PEDESTAL														
CUS1815	176	193	208	226	246	267	288	307	329	347	369	411	452	407

S SPECIFY

Code Fabric
AL - -

S Code: Consult the above product code list.

Fabric: Specify the fabric, refer to Artopex chair fabric sample cards.

A modern interior space, likely a library or study area. A long, illuminated light fixture is mounted on the ceiling. Below it, a wooden desk is visible. In the background, a white chair with a circular logo is positioned against a wall. The overall design is clean and functional.

electricity & lighting

Electricity & lighting

wireless charger	32
multi-outlet - for conventional wall power outlet 1-circuit electrical system	33
electrical components - 1-circuit Interlink Dean system	36
complements for electrical components cable management	38
lighting	45

Wireless charger

Inductive detection surface.

Works for most recent smartphones with wireless charging compatibility. (Qi Technology).

Phone and power level detection with automatic shutdown at 100% charging capacity.


Smart charging ranging from 5 Watts to 15 Watts.

20 AWG, 72 "(6 ') power cord.


WPC certification, Qi version 1.2.4 - FCC - CE - REACH - ROHS.

Electrical component(s) certified to electrical standards applicable in the United States and Canada.

Black tempered glass surface finish. Stainless steel contour.

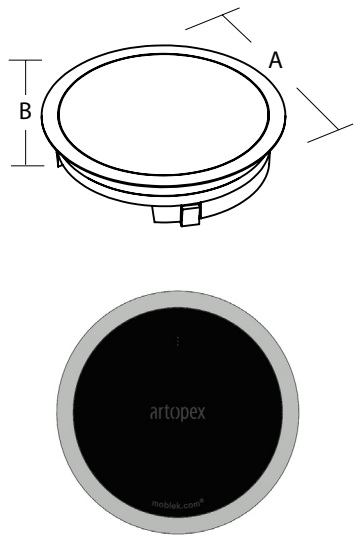

Code		Pice	Spec.	
A	B		Cu.Ft.	lb
3 1/2	7/8	AC-CSFRMO-N	482	0.1 1

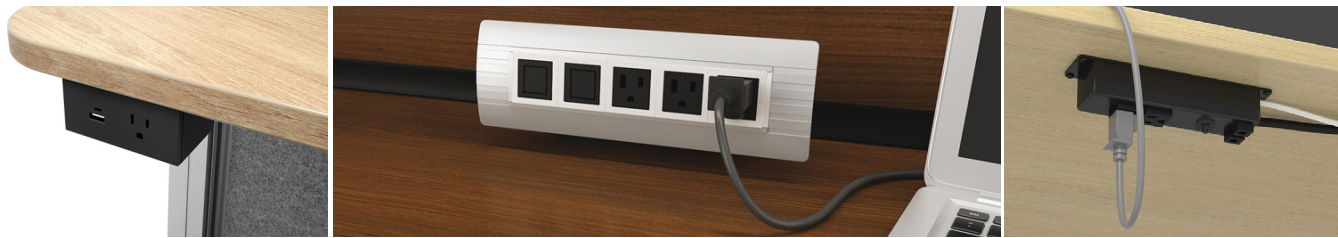

Multi-outlet - for conventional wall power outlet

Surface multi-outlet EPOS

Attaches to a surface with included Velcro® strips.
With 2 - 12 amp. outlets and 2 punch outs for communication outlets.
Connector and telecommunication wiring not included. Telecommunication outlet adaptors included.
108" electrical cord. The casing is made of black plastic.
Electrical component(s) certified according to electrical standards applicable in the United States and Canada

Multi-outlet EPA


Fits on a 1" to 1 ½" table surface with screw clamps.
With 3 - 15 amp. outlets and 2 punch outs for communication outlets.
Connector and telecommunication wiring not included. Removable covers are included.
72" electrical cord. The casing is made of anodized aluminum.
Electrical component(s) certified according to electrical standards applicable in the United States and Canada

Multi-outlet EPi and multi-outlet under surface EPiS

EPi: Attached with a clamp onto surfaces ½" to 1 ½" thick.
EPiS: Fixed under surface
With 2 - 15 amp. 1 USB-A outlet 12 Watts, 5V, 2.4 amp. for recharging, 1 USB-C outlet 60 Watts, 20 V, 3 amp. for recharging.
72" electrical cord. Casing made of grey and white plastic.
Electrical component(s) certified according to electrical standards applicable in the United States and Canada

Multi-outlet under surface EPiSQ2

Fixed under surface
1 15 amp. 1 USB-A outlet 18 Watts, 5V, 1.5 amp. for recharging, 1 USB-C outlet 25 Watts, 20 V, 1.25 amp. for recharging.
Power cord: 10'
Black plastic finish.
Electrical component(s) certified according to electrical standards applicable in the United States and Canada

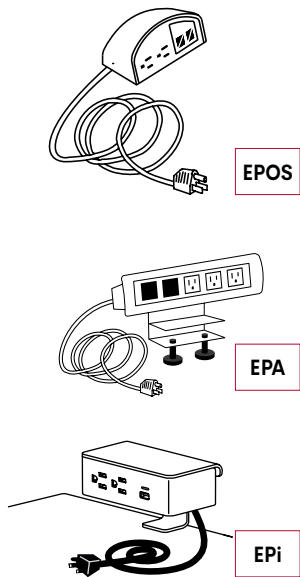

	Code	Price	Spec.	
			Cu.Ft.	lb
2 outlets	AC-EPOS	385	0.1	1
3 outlets	AC-EPA	577	0.4	5
2 outlets + 1 USB-A + 1 USB-C	AC-EPi	554	0.2	4
2 outlets + 1 USB-A + 1 USB-C	AC-EPiS	542	0.2	4
1 outlet + 1 USB + 1 USB C	AC-EPiSQ2	518	0.2	4



Multi-outlet - for conventional wall power outlet (cont'd)

Multi-outlet (installs under surface) EPU

2 outlets with a ground 12 amp circuit-breaker, surge suppressor.

1- RJ11 outlet for phone / fax / modem and a RJ45 category 5 outlet.

Connector and telecommunication wiring included.


108" electrical cord, 162" communication cables, the casing is made of black plastic.

Electrical component(s) certified according to electrical standards applicable in the United States and Canada

Multi-outlet (installs under surface) EPUP


3 outlets with a ground 12 amp circuit-breaker. 108" electrical cord, the casing is made of black plastic.

Electrical component(s) certified according to electrical standards applicable in the United States and Canada



EPU

	Code	Price	Spec.	
			Cu.Ft.	lb
2 outlets	AC-EPU	231	0.1	1
3 outlets	AC-EPUP	163	0.1	1



EPUP

Power bar with surge suppressor PWBE

Surge suppressor. Lighted main switch, 6 duplex outlets with ground.

EMI filter (Electro-Magnetic Interference). 96" power cord.


Electrical component(s) certified according to electrical standards applicable in the United States and Canada.

Can be installed under a surface.

Wire gauge 14GA.

125V AC 60Hz 15A.

1875 W capacity.

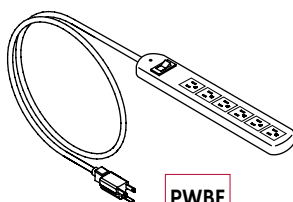


PWBE

	Code	Price	Spec.	
			Cu.Ft.	lb
	AC-PWBE	61	0.1	1

Moveable and USB outlet - for conventional wall power outlet

Moveable outlet


Installs in the cable tray or under a work surface with the **E2-EDT** support, [see p.39](#).
108" electrical cord, the casing is made of black plastic.
Electrical component(s) certified according to electrical standards applicable in the United States and Canada

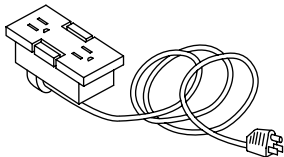

	Code	Price	Spec.	
			Cu.Ft.	lb
2 outlets	AC-ECM	194	0.1	1

USB outlet

1 USB-A 18W. and 1 USB-C 25W outlets, for use with the communication outlet plate **E2-ERD**, [see p.39](#), multi-outlet **AC-EPA** and multi-outlet M3 and M5. Transformer included.
Electrical component(s) certified according to electrical standards applicable in the United States and Canada



	Code	Price	Spec.	
			Cu.Ft.	lb
	E2-SUSB	171	0.1	1


Multi-outlet - 1-circuit Interlink Dean system

Surface multi-outlet


Overall dimensions of the outlet: 5 ½" x 3 ⅛" x 3 ⅝" under surface.
1 circuit Interlink Dean system, with "male / female" connectors.
Requires the AC-PFiQ120 power module (A maximum of 8 multi-outlet or jumper can be connected to a single power module.
Power will be automatically cut off if the combined number of multi-outlet and jumper exceeds 8).
2 electrical outlets 15 A.
1 USB-A 18W, 5V, 1.5 amp. for recharging. 1 USB-C 25W, 20V, 1.25 amp. for recharging.
60" (5') electrical cord.
Electrical component(s) certified according to electrical standards applicable in the United States and Canada
White finish.

Multi-outlet under surface

Overall dimensions of the outlet: 6 ¾" x 2 ¾" x 1 ⅛" high.
1 circuit Interlink Dean system, with "male / female" connectors.
Requires the AC-PFiQ120 power module (A maximum of 8 multi-outlet or jumper can be connected to a single power module.
Power will be automatically cut off if the combined number of multi-outlet and jumper exceeds 8).
2 electrical outlets 15 A.
1 USB-A 18W, 5V, 1.5 amp. for recharging. 1 USB-C 25W, 20V, 1.25 amp. for recharging.
60" (5') electrical cord.
Electrical component(s) certified according to electrical standards applicable in the United States and Canada
White finish.

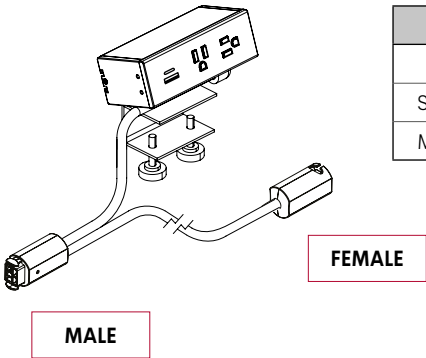


	Code	Price	Spec.	
			Cu.Ft.	lb
Surface multi-outlet	AC-EPiQ-B	729	0.2	4
Multi-outlet under surface	AC-EPSiQ-B	729	0.2	4

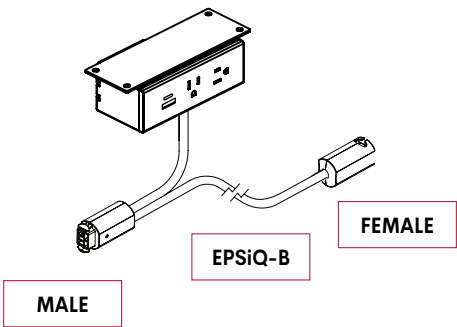

Electrical components - 1-circuit Interlink Dean system

Power module

Overall dimensions of the outlet: 4 3/4" x 2 3/4" x 1 5/16" high.
1 circuit Interlink Dean System.
"Female" type connection at one end with 125 V. wall outlet plug at the other end.
Surge protector and power supply module status indicator.
120" (10') electrical cord.
15 A.
Electrical component(s) certified according to electrical standards applicable in the United States and Canada
Black finish.

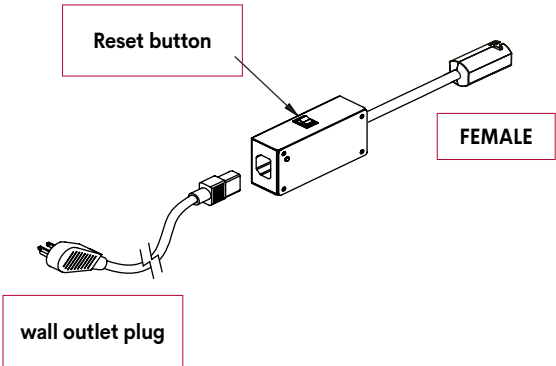


Code	Price	Spec.	
		Cu.Ft.	lb
AC-PFIQ120	797	0.1	1

ATTENTION:
A maximum of 8 multi-outlet or jumper can be connected to a single power module. Power will be automatically cut off if the combined number of multi-outlet and jumper exceeds 8.

Jumper

Lengths: 24", 36", 48", 60"
1 circuit Interlink Dean System.
Electrical component(s) certified according to electrical standards applicable in the United States and Canada
Black finish.

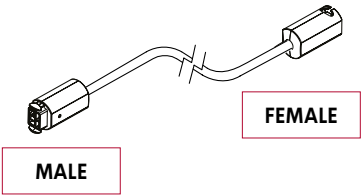

	Code	Price	Spec.	
			Cu.Ft.	lb
Jumper 60"	AC-JiQ60	195	0.1	1
Jumper 48"	AC-JiQ48	177	0.1	1
Jumper 36"	AC-JiQ36	175	0.1	1
Jumper 24"	AC-JiQ24	165	0.1	1

Complements for electrical components

Cable trays

Metal, silver finish. Installs under a work surface with screws.

Allows for passage of electrical & communication cabling. Cabling acces via both ends and sides.


Can accommodate 1-circuit electrical system.

32" or more: 4 openings on each side.

26" or less: 2 openings on each side.

Opening can accommodate moveable outlets (**AC-ECM** see p.35) or telecommunication

outlets (**E2-ERF, E2-ERD**, see p.39). Opening dimensions: 2 1/2" L x 1 3/8" H.

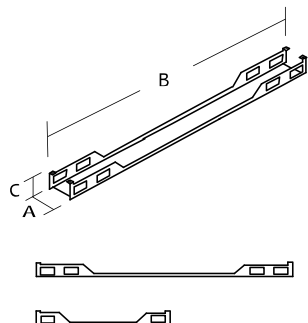

Dimensions				Code	Price	Spec.	
A	B	C	use with surface			Cu.Ft.	lb
4 1/4	68	3 3/4	78" or 84"	WCMC046804	192	1.0	6
4 1/4	62	3 3/4	72"	WCMC046204	181	0.9	5
4 1/4	56	3 3/4	66"	WCMC045604	173	0.8	5
4 1/4	50	3 3/4	60"	WCMC045004	164	0.7	5
4 1/4	44	3 3/4	54"	WCMC044404	156	0.6	4
4 1/4	38	3 3/4	48"	WCMC043804	149	0.5	4
4 1/4	32	3 3/4	42"	WCMC043204	139	0.5	3
4 1/4	26	3 3/4	36"	WCMC042604	132	0.4	2
4 1/4	20	3 3/4	30"	WCMC042004	121	0.3	2

S SPECIFY

Code Metal
AC- -


S Code: Consult the above product code list.

Metal: Specify the color, refer to the current Artopex enamels finish card.

Complements for electrical components (cont'd)

Support bracket for multi-outlets (AC-ECM) or communication outlet (E2-ERD)

Black metal. Installs under a work surface with screws.
Dimensions of the cut-out: 2 1/2" L x 1 3/8" H.



Code	Price	Spec.	
		Cu.Ft.	lb
E2-EDT	16	0.1	1

Cover plate

Installs on the openings of the cable trays, 2 1/2" L x 1 3/8" H.
Plastic, Black finish.



Code	Price	Spec.	
		Cu.Ft.	lb
E2-ERF	5	0.1	1

Communication outlet plate


Installs on the openings of the cable trays.
Can accomodate 2 adaptors for communication outlets. Opening: 15/16" x 15/16".
Plastic, Black finish.



Code	Price	Spec.	
		Cu.Ft.	lb
E2-ERD	5	0.1	1

Universal adaptor kit

Installs on communication outlet plates.
Compatible with most outlets on the market.
Plastic, Black finish.



Code	Price	Spec.	
		Cu.Ft.	lb
E2-ERU	5	0.1	1


Cable management

Cable tray

Attaches under a work surface, recycled paint finish #2021.

Two Velcro® strips to hold cabling.

Installation hardware included.

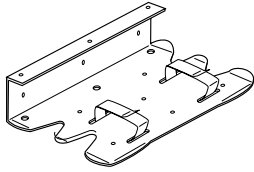


Dimensions			Code	Price	Spec.	
A	B	C			Cu.Ft.	lb
9 1/2	15	3	AC-EWS	214	0.3	4

Cable fasteners

Attach under the surface to hold cabling. Black finish.

Assembly hardware included.

Packages of 5.

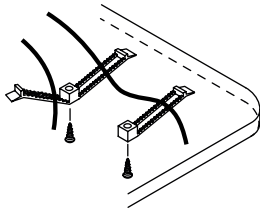

Code		Price	Spec.	
			Cu.Ft.	lb
Single fastener	AC-EWF1	24	0.1	1
Double fastener	AC-EWF2	31	0.1	1

Flexible wire through

Wire through, 72" long, can be easily cut to required length. 1" diameter.

Wraps around electrical and communications cables to protect and organize the cables underneath the work surface.

Gray finish.




Code		Price	Spec.	
			Cu.Ft.	lb
AC-WRF72		119	0.1	1

Wire trough

24" long wire trough, Black finish.

Multiple wire capacity and allows for wires to run along the modesty panels or other components.

Self-adhesive installation.

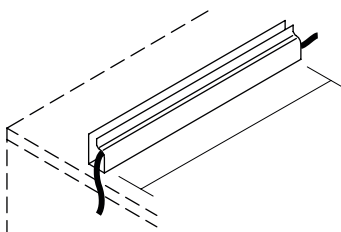


Code		Price	Spec.	
			Cu.Ft.	lb
AC-WR24		35	0.1	1

Cable management (cont'd)

Narrow wire trough

24" long wire trough. Can be installed on the side of a leg, on the back of a hutch or a screen, or under a surface.
Can hold one or two small-sized wires.
Self-adhesive installation. Can be easily cut.
Specify the finish. Pack of 10 segments.

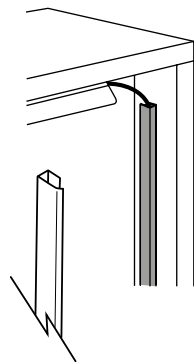

Code		Price	Spec.	
			Cu.Ft.	lb
Pack of 10	LW24	70	0.6	1

S SPECIFY

AC - Code Finish

S Code: Consult the above product code list.
Finish: Specify the finish: Black (N), Charcoal (F), Gray (G) or White (BW).

Cable management (cont'd)

Flexible wire manager


Flexible wire manager (metallic gray finish), for wiring from surface to floor.
Shipped assembled with installation hardware.



Code		Price	Spec.	
			Cu.Ft.	lb
AC-EVCC		160	0.4	2

Extendable wire manager (Suitable for adjustable tables)


2 1/2" diameter conduit with 3" x 6" elliptical base. Black plastic finish.
Installs under a surface and allows passage of wiring from surface to the floor. Spiral extends from 16" to 55" H.



Dimensions		Code	Price	Spec.	
A	B			Cu.Ft.	lb
6	55	AC-EVCS	138	0.5	2

Metal grommet

Metal grommet (2 3/8" diam.) for on-site installation, Satin Chrome finish.
Brush grommet.




Code	Price	Spec.	
		Cu.Ft.	lb
AC-EGMR64	175	0.1	1

Plastic grommets

Plastic grommet (1 1/2" diam.) for on-site installation, Dark Brown finish.
Cap can be closed when not in use.

Plastic grommet (2 1/2" diam.) for on-site installation, Black finish.
Cap can be closed when not in use.




Code		Price	Spec.	
			Cu.Ft.	lb
Grommet 1 1/2" diam.	AC-EGR38-B	29	0.1	1
Grommet 2 1/2" diam.	AC-EGR64-N	37	0.1	1

Cable management (cont'd)

Oval grommet

For on-site installation. Requires drilling of a round hole (2 3/4" diam.).

Available in Frost.




Code		Price	Spec.	
			Cu.Ft.	lb
Oval grommet	EGR70	21	0.2	2

Rectangular grommet

For replacement. Opening dimensions: 3 3/8" L x 1 5/8" H.

Available in Black, Charcoal, Frost or White.



Code		Price	Spec.	
			Cu.Ft.	lb
Rectangular grommet	EGRTF	37	0.2	2


S SPECIFY

AC - Code Finish

S Code: Consult the above product code list.
Finish: Specify the finish of the grommet: Black (N), Charcoal (F), Frost (A) or White (BW).

Cable management (cont'd)

Mesh Wiring Basket.
Helps contain excess wiring under the work surface.
Installs under the work surface with the included mounting clips.

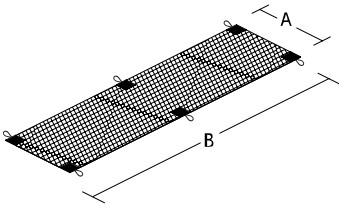

		Code	Price	Spec.	
A	B			Cu.Ft.	lb
10	48	PCM1048	142	1.0	1
10	36	PCM1036	126	1.0	1
10	24	PCM1024	108	1.0	1

S

SPECIFY

AC -

Code

-

Mesh

S


Code: Consult the above product code list.
Mesh: Specify the finish : Aero Black (MA06) or Aero Aluminum (MA26).



Task lights

Fluorescent task light


Installs under a laminate hutch.
Included magnet allows for installation under a metal shelf.
Once installed, the task light pivots 45° to adjust light direction.
Includes a T5 fluorescent tube. Power cord: 9'.
Electrical component(s) certified according to electrical standards applicable in the United States and Canada
Aluminum finish.

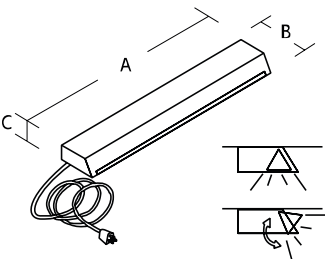

Dimensions				Code	Price	Spec.		
A	B	C	Exact length			Watt	Cu.Ft.	lb
48	3 3/8	1 1/8	48 1/4"	AC-ETLF48	244	28	0.2	2
36	3 3/8	1 1/8	36 3/8"	AC-ETLF36	194	21	0.2	2
24	3 3/8	1 1/8	24 1/2"	AC-ETLF24	148	14	0.1	1

LED task light

Installs under a laminate hutch.
Included magnet allows for installation under a metal shelf.
Once installed, the task light pivots 45° to adjust light direction.
Optional activation of a pre-set movement detector (30 minutes period) using the switch.
Includes a 20" connection cable (maximum 8 tasklights, series circuit).
Power cord: 9'.
Electrical component(s) certified according to electrical standards applicable in the United States and Canada
Silver finish.

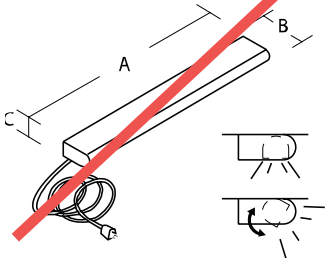

Dimensions				Code	Price	Spec.		
A	B	C	Exact length			Watt	Cu.Ft.	lb
48	3 3/8	1 1/8	48 1/4"	AC-ETLED48	471	18	0.2	2
36	3 3/8	1 1/8	36 3/8"	AC-ETLED36	404	14	0.2	2
24	3 3/8	1 1/8	24 1/2"	AC-ETLED24	366	8	0.1	1
18	3 3/8	1 1/8	18 3/4"	AC-ETLED18	273	6	0.1	1

IMPORTANT:
No replacement tube available for this fixture, the LED light inside the unit cannot be replaced.

Task lights (cont'd)

LED Desk lamp

Desk lamp, LED 5W, neutral white lighting.


Light dimming: 30%, 60% and 100%. Touch-control.

Flexible and strong gooseneck arm.

Power cord: 6'.

Electrical component(s) certified according to electrical standards applicable in the United States and Canada

Silver finish metal, Black finish base.



Dimensions			Code	Price	Spec.		
A	B	C			Watt	Cu.Ft.	lb
7	5 1/4	25	AC-ETLT	642	5	0.5	2

C: Neck length



IMPORTANT:

No replacement tube available for this fixture, the LED light inside the unit cannot be replaced.



Electricity for the Electrical Unit

Two types of electrical systems can be installed in the Electrical Unit. The 4-circuit system and the 1-circuit system.

4-circuit electrical system

This consists of a harness, a double electrical outlet(s), an interconnector to link the harnesses together, and various power supply cables. The 4-circuit electrical system must be positioned inside the electrical unit.

This system can be supplied either via floor, wall or ceiling access (using a supply column). Openings in the electrical unit allow such access.

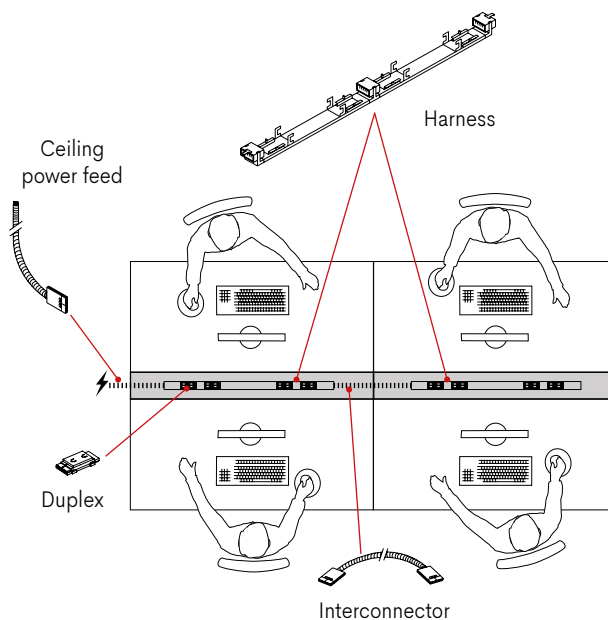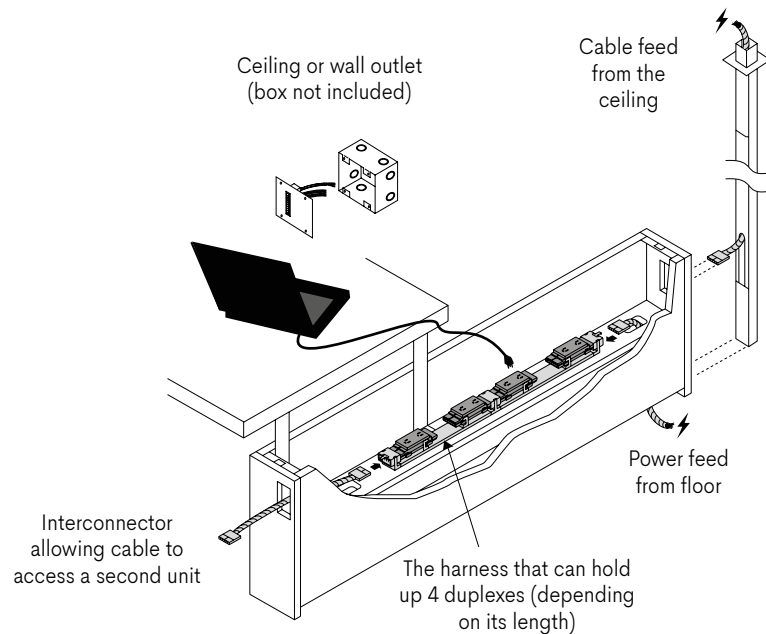


Electricity for the Electrical Unit

Two types of electrical systems can be installed in the Electrical Unit. The 4-circuit system and the 1-circuit system.

4-circuit electrical system


This consists of a harness, a double electrical outlet(s), an interconnector to link the harnesses together, and various power supply cables. The 4-circuit electrical system must be positioned inside the electrical unit.

This system can be supplied either via floor, wall or ceiling access (using a supply column). Openings in the electrical unit allow such access.

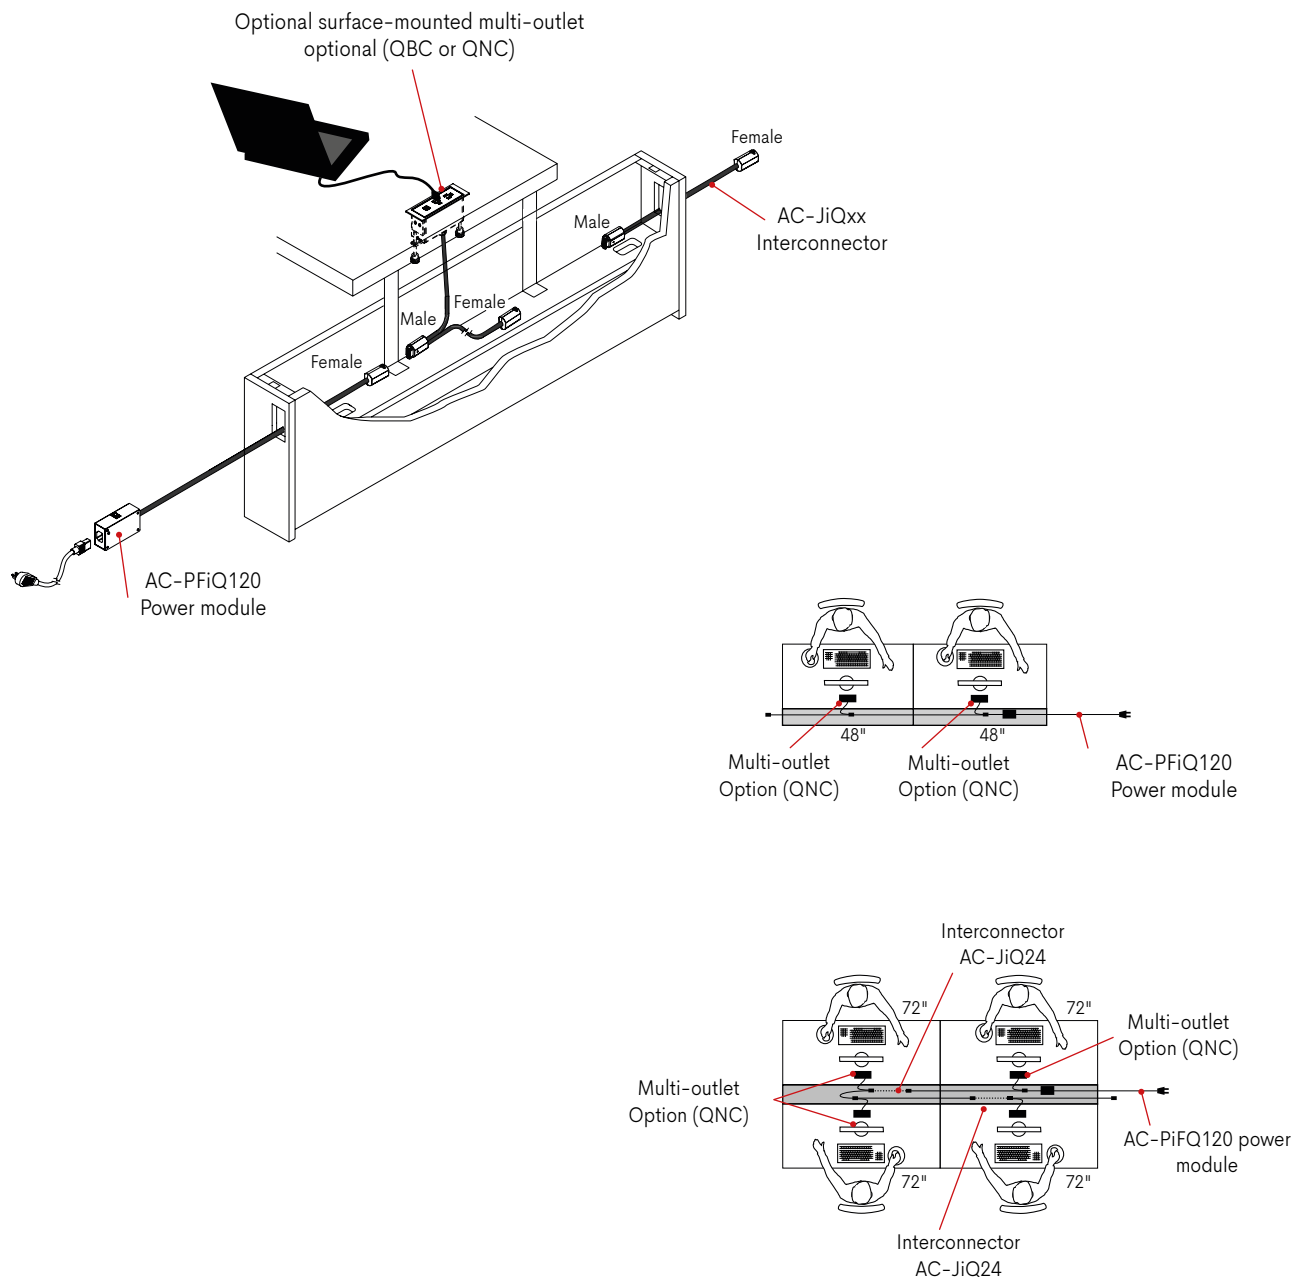

Cable pole for credenza

Cable pole for credenza.
Can be cut on-site if necessary.
The lower section of the cable pole includes 1 opening that is perfectly aligned with the grommet on the side of a credenza.
Included : screws to fix to the credenza, stopper for cover and a ceiling tile adapter (white).
An interior metal divider can be ordered separately if required.
Power feed to be ordered separately.

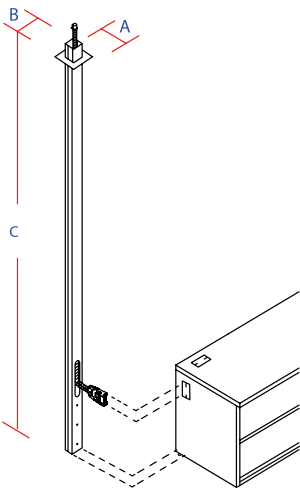

Dimensions			Code	Price	Spec.	
A	B	C			Cu.Ft.	lb
3	3	120	CPC33120	489	2.0	13,5
1 ½	3	120	CPC13120	433	1.5	11

SPECIFY

Code Metal
AC- -

Code: Consult the product code above.
Metal: Specify the metal finish (34 colors).

Electrical Unit


Unit for electrical and communication wiring.

Access to outlets via a door on the top of the unit. This door pivots on 2 axes (2-sided access) and can be removed by lifting.




Access to wiring from the ends or from below. An AC-CPC33120 or AC-CPC13120 colonette from the Takeoff series can be installed at the end of the electrical unit.

Can be fitted with AC-SEUF and AC-SEUA worktops on 2 sides of the unit.

Can accommodate AL-PU privacy screen for electric unit. Electrical components sold separately.

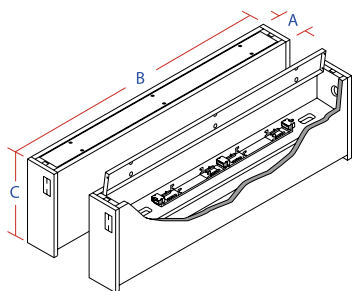

Dimensions			Code	Price	Spec.	
A	B	C			Cu.Ft.	lb
8 1/2	72	23 7/16	EU87223	863	12.7	122
8 1/2	66	23 7/16	EU86623	834	12.0	113
8 1/2	60	23 7/16	EU86023	803	11.2	104
8 1/2	54	23 7/16	EU85423	776	10.5	94
8 1/2	48	23 7/16	EU84823	747	9.7	85
8 1/2	42	23 7/16	EU84223	718	9.0	75
8 1/2	36	23 7/16	EU83623	688	8.2	66
8 1/2	30	23 7/16	EU83023	660	7.5	57
8 1/2	24	23 7/16	EU82423	630	6.7	47

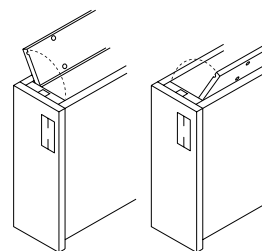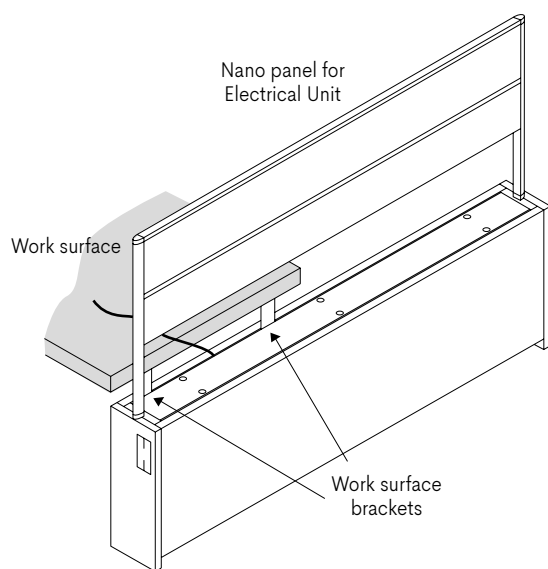

S SPECIFY

Code Base Metal
 AC- - L - -


S Code: Consult the above product code list.

Base: Specify color. Refer to the current Artopex laminate finish chart.


Metal: Specify color, refer to the current Artopex enamel finish card.

Set of Fixed Supports for Electrical Unit

Fixed worktop brackets attach to the inside of the electrical unit for a height of 27 7/8" below the surface.
Wood screws included.
Set of 2 brackets.



Dimensions	Code	Price	Spec.	
A			Cu.Ft.	lb
3	SEUF	121	0.3	5.8

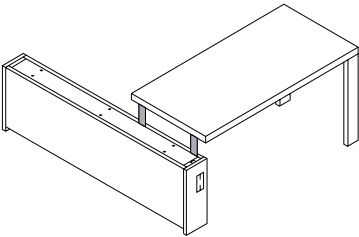


S SPECIFY

AC- Code Metal


S Code: Consult the above product code list.
Metal: Specify color, refer to the current Artopex enamel finish card.

Set of Adjustable Supports for Electrical Unit

Adjustable worktop brackets attach to the inside of the electrical unit for a height of 27" to 29" below the surface.
Brackets should ideally be used with Take Off AC-LA1T28 adjustable legs.
Wood screws included.
Set of 2 brackets.



Dimensions	Code	Price	Spec.	
A			Cu.Ft.	lb
3	SEUA	139	0.4	6.7

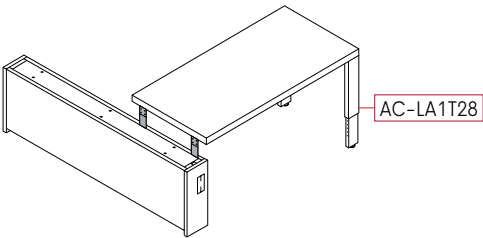

S

SPECIFY

Code

Metal

AC-

-


S

Code: Consult the above product code list.


Metal: Specify color, refer to the current Artopex enamel finish card.

Surface reinforcement

Surface reinforcement lends rigidity to the assembly of a worktop with the electrical unit when these are perpendicular and without other fasteners.
Wood screws included.



Code	Price	Spec.	
		Cu.Ft.	lb
EUST	119	0.2	2.6



S SPECIFY

CodeMetal

AC- -

S Code: Consult the above product code list.
Metal: Specify color, refer to the current Artopex enamel finish card.

Electrical components - 4 circuit system

Harness

Electrical Unit harnesses from 24" to 72" in length (24": 1 duplex / 30" and 36": 2 duplexes / 42" to 72": 4 duplexes).

Requires jumpers to link adjacent Electrical Units.

1 jumper entry at each end of the harness. For 2 entries use the iE-Y coupling (see next page).

Jumper Interconnector

Carries power between two Electrical Units when jumping a third Electrical Unit (without harness) placed in between them.


The iE-i coupling (female-female) must be used to connect 2 jumpers (male-male) end-to-end.

1 jumper entry at each end of the harness. For 2 entries use the iE-Y coupling (see next page).

*The conduit panel jumper AC-EJS12 is used in a configuration of 90° ("L" or "T").

In-Line Interconnector

Carries power between two Electrical Units when placed side-by-side (in line).

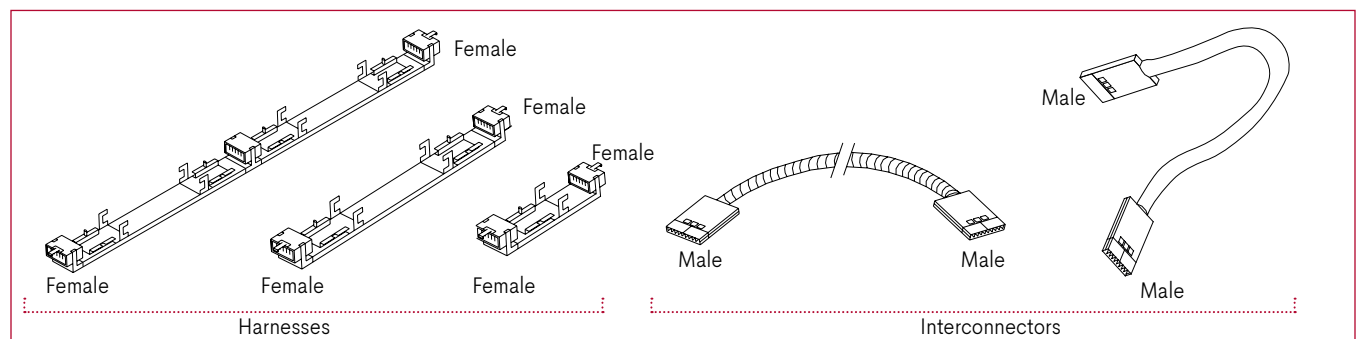

Dimensions		Code	Price	Spec.	
	Actual size			Cu.Ft.	lb
HARNESSES					
For a 72" long electrical unit		AL-HSS72	302	0.8	5.0
For a 66" long electrical unit		AL-HSS66	296	0.8	4.5
For a 60" long electrical unit		AL-HSS60	289	0.7	4.0
For a 54" long electrical unit		AL-HSS54	281	0.7	3.5
For a 48" long electrical unit		AL-HSS48	265	0.6	3.0
For a 42" long electrical unit		AL-HSS42	260	0.5	2.5
For a 36" long electrical unit		AL-HSS36	207	0.5	2.0
For a 30" long electrical unit		AL-HSS30	201	0.4	1.5
For a 24" long electrical unit		AL-HSS24	192	0.3	1.0
CONDUIT PANEL JUMPERS					
To jump a 60" Electrical Unit	82	AC-EJS60	316	0.1	4.0
To jump a 54" Electrical Unit	76	AC-EJS54	312	0.1	3.7
To jump a 48" Electrical Unit	70	AC-EJS48	302	0.1	3.5
To jump a 42" Electrical Unit	64	AC-EJS42	274	0.1	3.2
To jump a 36" Electrical Unit	58	AC-EJS36	268	0.1	3.0
To jump a 30" Electrical Unit	52	AC-EJS30	263	0.1	2.7
To jump a 24" Electrical Unit	46	AC-EJS24	260	0.1	0.5
For a 90° and 120° configuration	34	AC-EJS12	242	0.1	0.5
IN-LINE JUMPERS					
21" long		AC-J21	112		

Electrical components - 4 circuit system

Power Connectors

"i" coupling to connect 2 jumpers end-to-end.
"Y" coupling connects a single harness to 2 jumpers.


Duplex

Attaches to a power feed in the cable channel and gives access to one of the circuits.
Duplexes 1, 2 and 3 give access to general use circuits.
Duplex 4 is used for an isolated circuit.

E2-USB outlet gives acces to 2 USB rechargeable outlets

Bracket for Communication Outlet

Metal support used to hold several communication outlets.
Installs on or under the electrical unit harness with double-faced tape (see illustration at right).
Black finish.
The communication outlet and its components are not included but are available at your local distributor.

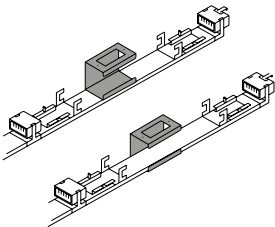

Ceiling Connectors (AC-EC15 & AC-EC18)

The ceiling connector is a shielded flexible cable.
The AC-EC15 connector must be installed by a certified electrician in accordance with local building codes.
Connects at the end of a harness.
The AC-EC18 connector can be attached to the power feed connector during re-organization by the user.


Wall and ground power connector

To distribute current from the junction box to the power distribution harnesses. It is fitted with a male plug which connects to a power distribution harness.

Junction box cover with outlet

Cover for 4 1 1/8" x 4 1 1/8" junction box with "Plug and play" outlet (female) for AC-EC18 ceiling outlet.
The junction box (not included) can be wall-mounted at the height prescribed by the current building code, or ceiling-mounted near the end of the power supply column. Must be connected to the source by a certified electrician in accordance with the current building code.

	Code	Price	Spec.	
			Cu.Ft.	lb
"i" Couplin	iE-i	73	0.1	0.5
"Y" Coupling	iE-Y	103	0.1	0.5
Duplex - Circuit 1	iE-DO1	28	0.1	0.1
Duplex - Circuit 2	iE-DO2	28	0.1	0.1
Duplex - Circuit 3	iE-DO3	28	0.1	0.1
Duplex - Circuit 4 (isolated)	iE-DO4	28	0.1	0.1
Communication Outlet Bracket	E2-EDT	16	0.1	0.1
USB rechargeable outlet - Circuit 1	E2-USB	263	0.2	1.0
180" Ceiling jumper (for box)	AC-EC15	253	0.6	3.0
216" Ceiling jumper (for E2-ECWD outlet)	AC-EC18	446	0.7	4.0
Wall and ground power connector 60"	AC-ECJO	218	0.1	3
Junction box cover for outlet	E2-ECWD	299	0.1	0.2

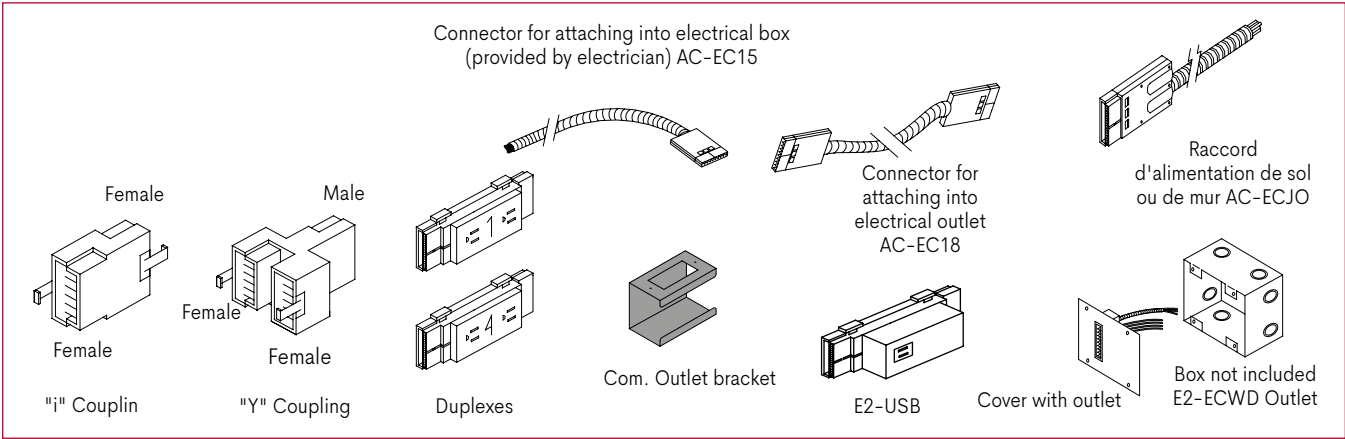

Panel (1 section) for electrical unit - 19" H.


19" H. single configuration panel for Electrical Unit.

Nano panels can attach to this panel, along with the 90° or 120° floor connectors.

Horizontal woodgrain, frame in anodized aluminum.


No shelf or hanging element can be attached to the hanging slot situated directly above an acrylic section.

For tackboard finish, always indicate "T" before fabric code.

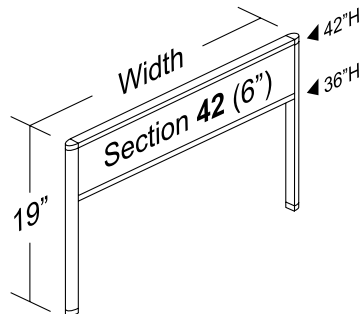

Code		Price	Spec.	
Width		Laminate	Cu.Ft.	lb
72	PU1972-4	545	1.6	10.6
66	PU1966-4	509	1.5	9.7
60	PU1960-4	470	1.4	8.9
54	PU1954-4	427	1.2	8.0
48	PU1948-4	364	1.1	7.2
42	PU1942-4	325	0.9	6.3
36	PU1936-4	295	0.8	5.5
30	PU1930-4	285	0.7	4.7
24	PU1924-4	267	0.6	3.8

Adjustment Zone (amount to add to the standard laminate price)

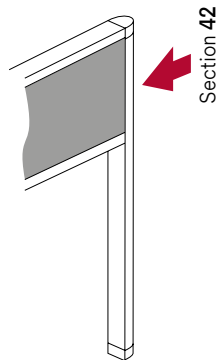

Fabric		Acrylic		M-Board		Tackboard (T_...)							
Width	Com/Gr.1	Gr.2	Gr.3	Gr.4	Gr.5			Com/Gr.1	Gr.2	Gr.3	Gr.4	Gr.5	
72	66	69	72	76	78	188	115	134	139	149	156	164	
66	61	64	69	72	76	176	100	122	127	133	138	148	
60	59	61	64	68	72	160	88	106	110	116	123	129	
54	56	59	61	64	69	149	73	101	107	113	121	126	
48	53	58	60	63	66	131	64	99	102	108	115	122	
42	52	56	58	61	64	122	52	94	99	102	108	115	
36	48	52	56	59	61	108	44	93	96	101	106	112	
30	43	44	46	49	53	101	34	88	93	96	100	106	
24	41	43	44	46	49	98	25	83	89	94	98	102	

S SPECIFY

Code Sect. 42
AL- - O -

S Code: Consult the above product code list.

Section 42: Specify the finish: Standard laminate, fabric, acrylic, markerboard or tackboard (Nano panel finish), see Adjustment Zone for pricing.

Price calculation: The standard prices shown are for a configuration with a thermally fused laminate finish (T.F.L.).

For other finishes, ADD the amount indicated in the Adjustment Zone to the standard price according to your choice.

Panel (1 section) for electrical unit - 27" H.


27" H. single panel configuration for Electrical Unit.

Nano panels can attach to this panel, along with the 90° or 120° floor connectors.


Horizontal woodgrain, frame in anodized aluminum.

No shelf or hanging element can be attached to the hanging slot situated directly above an acrylic section.

For tackboard finish, always indicate "T" before fabric code.

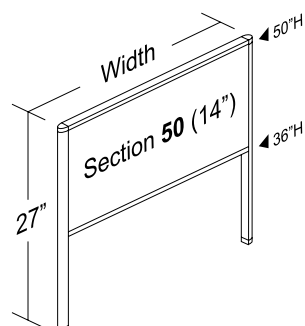

Code		Price	Spec.	
Width		Laminate	Cu.Ft.	lb
72	PU2772-5	580	2.4	23.6
66	PU2766-5	543	2.2	21.6
60	PU2760-5	502	2.0	19.6
54	PU2754-5	461	1.8	17.7
48	PU2748-5	398	1.6	15.7
42	PU2742-5	363	1.4	13.7
36	PU2736-5	323	1.2	11.7
30	PU2730-5	319	1.0	9.7
24	PU2724-5	305	0.8	7.7

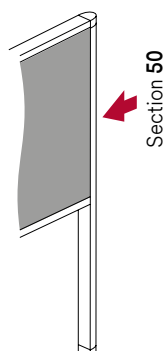

Adjustment Zone (amount to add to the standard laminate price)

Fabric						Acrylic		M-Board		Tackboard (T_____)			
Width	Com/Gr.1	Gr.2	Gr.3	Gr.4	Gr.5			Com/Gr.1	Gr.2	Gr.3	Gr.4	Gr.5	
72	79	83	89	94	98	203	188	145	152	158	166	175	
66	77	79	83	89	94	188	176	130	137	147	153	159	
60	70	74	77	80	87	176	160	121	126	131	137	147	
54	68	70	74	77	80	160	149	110	116	123	128	134	
48	60	63	66	69	73	141	135	103	110	115	122	128	
42	59	61	64	68	70	134	122	102	107	113	121	126	
36	58	60	63	66	69	129	100	99	102	108	113	121	
30	56	59	61	64	68	122	79	95	99	106	108	115	
24	53	58	59	63	66	115	63	90	95	100	103	110	

S SPECIFY

Code Sect. 50
AL- - O -

S Code: Consult the above product code list.

Section 50: Specify the finish: Standard laminate, fabric, acrylic, markerboard or tackboard (Nano panel finish), see Adjustment Zone for pricing.

Price calculation: The standard prices shown are for a configuration with a thermally fused laminate finish (T.F.L.).

For other finishes, ADD the amount indicated in the Adjustment Zone to the standard price according to your choice.

Panel (2 sections) for electrical unit - 27" H.


27" H. double panel configuration for Electrical Unit. (2 sections).

Nano panels can attach to this panel, along with the 90° or 120° floor connectors.

Horizontal woodgrain, frame in anodized aluminum.


No shelf or hanging element can be attached to the hanging slot situated directly above an acrylic section.

For tackboard finish, always indicate "T" before fabric code.

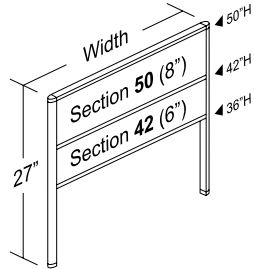


	Code	Price	Spec.	
Width		Laminate	Cu.Ft.	Lb
72	PU2772-45	766	2.4	23.6
66	PU2766-45	712	2.2	21.6
60	PU2760-45	651	2.0	19.6
54	PU2754-45	587	1.8	17.7
48	PU2748-45	502	1.6	15.7
42	PU2742-45	448	1.4	13.7
36	PU2736-45	390	1.2	11.7
30	PU2730-45	380	1.0	9.7
24	PU2724-45	361	0.8	7.7

Adjustment Zone (amount to add to the standard laminate price)

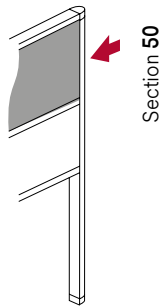

Section 50

Fabric						Acrylic		M-Board	Tackboard (T_____)					
Width	Com/Gr.1	Gr.2	Gr.3	Gr.4	Gr.5				Com/Gr.1	Gr.2	Gr.3	Gr.4	Gr.5	
72	68	70	74	77	80	191	122		139	149	156	164	171	
66	63	68	70	73	77	178	107		128	133	139	149	156	
60	60	63	66	70	73	166	94		115	122	127	131	138	
54	59	61	64	68	72	152	79		106	110	116	123	129	
48	58	60	63	66	69	137	68		101	107	112	119	124	
42	56	59	61	64	68	126	58		98	101	107	113	119	
36	53	58	60	63	66	113	46		95	100	103	110	116	
30	52	56	59	61	64	107	37		90	95	100	103	110	
24	49	53	58	60	63	100	31		88	94	98	101	107	



Section 42

72	66	69	72	76	78	188	115		134	139	149	156	164	
66	61	64	69	72	76	176	100		122	127	133	138	148	
60	59	61	64	68	72	160	88		106	110	116	123	129	
54	56	59	61	64	69	149	73		101	107	113	121	126	
48	53	58	60	63	66	131	64		99	102	108	115	122	
42	52	56	58	61	64	122	52		94	99	102	108	115	
36	48	52	56	59	61	108	44		93	96	101	106	112	
30	43	44	46	49	53	101	34		88	93	96	100	106	
24	41	43	44	46	49	98	25		83	89	94	98	102	

S SPECIFY

Code Sect. 42 Sect. 50
 AL- - O - -

S Code: Consult the above product code list.

Section 42 & 50: Specify the finish: Standard laminate, fabric, acrylic, markerboard or tackboard (Nano panel finish), see Adjustment Zone for pricing.

Price calculation: The standard prices shown are for a configuration with a thermally fused laminate finish (T.F.L.).

For other finishes, ADD the amount indicated in the Adjustment Zone to the standard price according to your choice.

Semi-opaque privacy screen for nano panel

Semi-opaque weaved flexible privacy screen installed between workstations. Allows access to the outlets (in the electrical unit). Installs under a Nano panel specified for the Air Line electrical unit. Can be installed on an existing configuration. Charcoal finish.



Dimensions		Code	Price	Spec.	
A	B			Cu.Ft.	lb
11	72	NASC1172	340	0.7	2.2
11	66	NASC1166	338	0.6	2.0
11	60	NASC1160	334	0.6	1.8
11	54	NASC1154	272	0.5	1.7
11	48	NASC1148	268	0.5	1.5
11	42	NASC1142	263	0.4	1.3
11	36	NASC1136	199	0.3	1.1
11	30	NASC1130	195	0.3	0.9
11	24	NASC1124	192	0.2	0.7

S SPECIFY

Code

AL-

S Code: Consult the above product code list.

Ergonomics



Ergonomiques

keyboard shelves

retractable mechanism	62
"sit-stand" mechanism	65
pull-out	67

cpu holders	68
-------------	----

monitor arms

surface mount	69
pole mounted	73
mounted on accessory bar	77
wall mounted	78

Keyboard shelves with retractable mechanism

Resin shelf

Retractable mechanism with assisted adjustments.

The mechanism has a thin tapered profile, respects ergonomics requirements and is fully recyclable.

21 3/4" Slides: allows the keyboard shelf to glide deeper underneath the surface when not in use.


17" Slides: recommended for surfaces smaller than 24" deep.

Phenolic resin shelf with slip resistant strips.

Mousepad swivels (9" diam.) and can be installed for left or right-handed users, with cable guides.

Shelf and mousepad, Graphite finish.


Removable foam-gel wrist rest, Black finish.

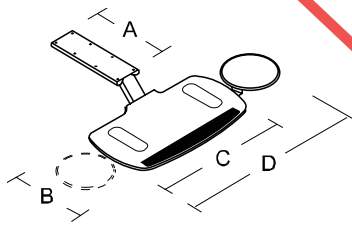

Dimensions				Code	Price	Spec.	
A	B	C	D			Cu.Ft.	lb
21 3/4"	11	21	28	AC-KRFP21	839	1.6	25
17"	11	21	28	AC-KRFP17	786	1.4	21

Slip resistant strips

Swivelling mousepad

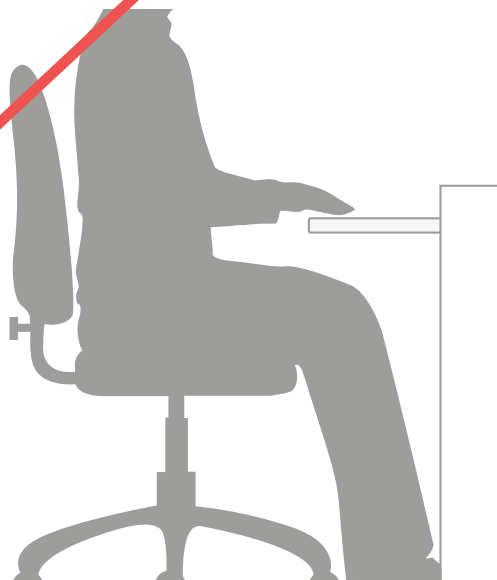


Keyboard shelves with retractable mechanism (cont'd)

Laminate shelf

Retractable mechanism with assisted adjustments.
The mechanism has a thin tapered profile, respects ergonomics requirements and is fully recyclable.
21 3/4" Slides: allows the keyboard shelf to glide further underneath the surface when not in use.
17" Slides: recommended for surfaces smaller than 24" deep.

Laminate shelf 1/16" thick that accomodates keyboard and mouse.
Shelf is reversible so it can be installed for left or right-handed users.
Gel wrist rest, Black finish.

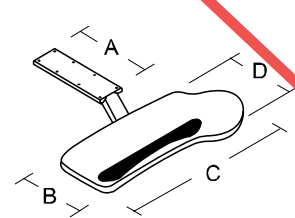



Dimensions				Code	Price	Spec.	
A	B	C	D			Cu.Ft.	lb
21 3/4	11	28	13	KRFS21-L	750	1.3	25
17	11	28	13	KRFS17-L	696	1.2	21

S SPECIFY


Code Laminate
AC - -

S Code: Consult the above product code list.
Laminate: Specify the finish of the keyboard shelf. Refer to the current Artopex laminate finish card.


Keyboard shelves with retractable mechanism - Technical specifications

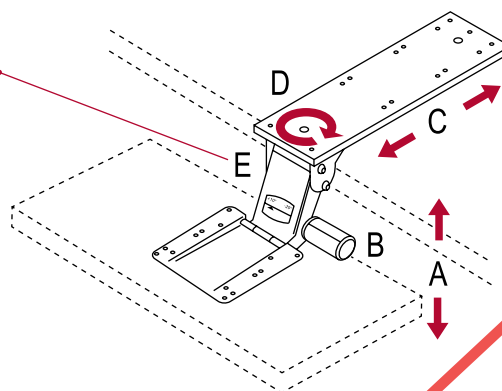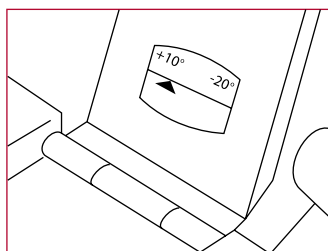

- A - Height adjustment: assisted automatic lock (without knob)
- B - Angle adjustment with handle (effortless)
- C - Length of slide: 17" or 21 3/4"
- D - 360° swivel
- E - Keyboard shelf angle and height indicator

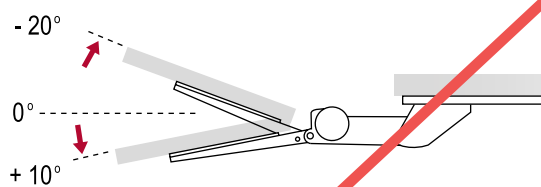


KEYBOARD SHELF ANGLE: + 10° to - 20°

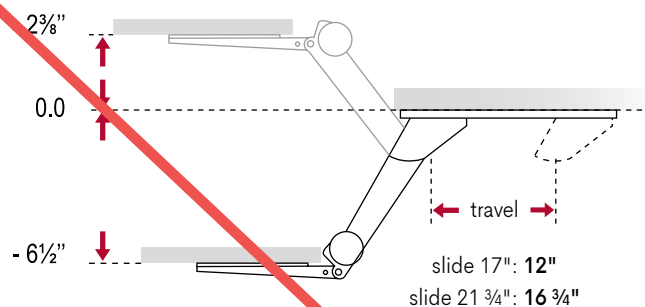


HEIGHT ADJUSTMENT: + 2 3/8" to - 6 1/2"

Keyboard shelf with "sit-stand" mechanism



Retractable mechanism with a high degree of "sit-stand" assisted adjustments.
Phenolic resin shelf with slip resistant strips.
Mousepad swivels (9" diam.) and can be installed for left or right-handed users, with cable guides.
Shelf and mousepad, Graphite finish.
Removable gel wrist rest, Black finish.

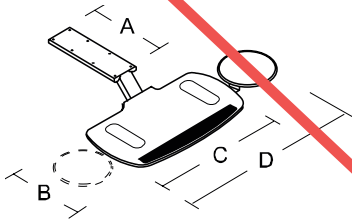


Dimensions				Code	Price	Spec.	
A	B	C	D			Cu.Ft.	lb
21¾	11	21	28	AC-KSSP21	963	1.6	25

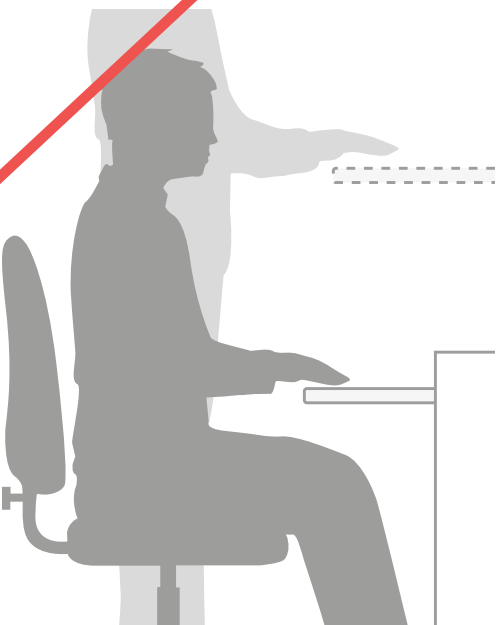


Keyboard shelf with "sit-stand" mechanism - Technical specifications

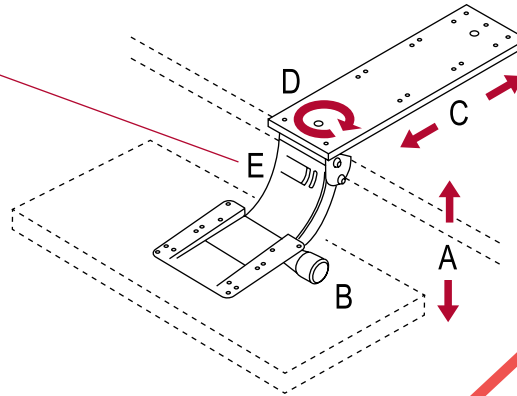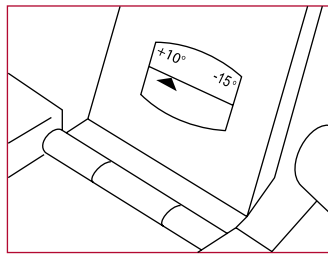

- A - Height adjustment: assisted automatic lock (without knob)
- B - Angle adjustment with handle (effortless)
- C - Length of slide: 21 3/4"
- D - 360° swivel
- E - Keyboard shelf angle and height indicator

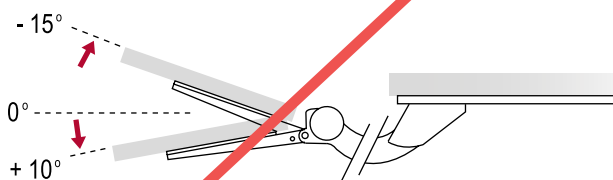


KEYBOARD SHELF ANGLE: + 10° to - 15°

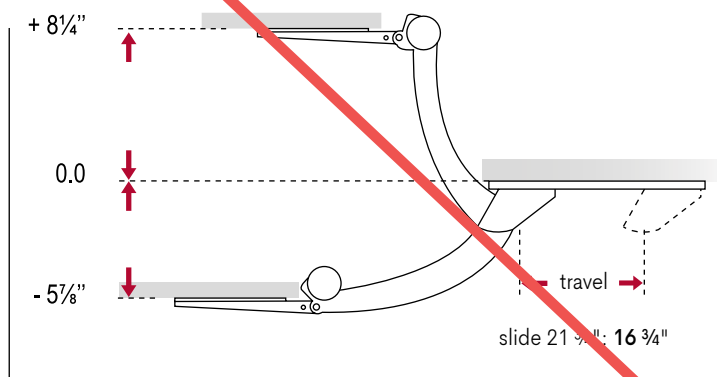

HEIGHT ADJUSTMENT: + 8 1/4" to - 5 7/8"

Keyboard shelves, pull-out

Laminate shelf
Keyboard shelf on ball bearing slides that accomodates keyboard and mouse.
When installed, this keyboard shelf is height adjustable (4 positions, increments of 1/2").
Installs under a surface 21" and over deep.
Thermally Fused Laminate (T.F.L.) shelf 1 1/8" thick.
Optional gel wrist rest available (see below).

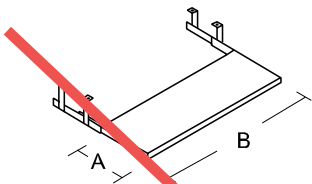

Dimensions		Code	Price	Spec.	
A	B			Cu.Ft.	Wt. lb
11	27	KPL1127-L	228	1.0	8

S SPECIFY


CodeLaminate

AC - -

S Code: Consult the above product code list.
Laminate: Specify keyboard shelf finish, refer to the current Artopex laminate finish card.

Wrist rest

Non-slip base, $\frac{3}{4}$ " thick.
Gel, Black finish.




Dimensions		Code	Price	Spec.	
A	B			Cu.Ft.	lb
17	2 1/4	AC-KWG19	61	0.1	1

Cpu holders

Swivelling retractable holder

Swivels 360°. Installs underneath a work surface, with screws.
Interior adjustment for cpu sizes from: 3 1/2" - 9.3" wide and 13 1/2" - 22 1/2" high.
Minimum total height: 19"
Maximum total height: 28"
Load rating: 85 lb.
Black finish.



Dimensions		Code	Price	Spec.	
A				Cu.Ft.	lb
17		AC-ACPU	332	0.7	13




IMPORTANT:

For adjustable tables II, if an AC-ACUP cpu support used with an AC-OSB spacing attachment set, the maximum space for a cpu will be 15 3/4" high.

Holder on casters

Mobile metal cpu holder, width adjustment 5 1/4" - 10". Foam pads on sides to protect computer's and holder's surfaces.
Locking casters.
Black finish.



Dimensions		Code	Price	Spec.	
A	B			Cu.Ft.	lb
8	9 1/2	AC-ACPUC	135	0.8	6

Double extension monitor arm, surface mount

Double extension monitor arm for 1 or 2 flat screens. Dynamic adjustments: arm height, monitor extension, tilt and rotation.
Includes two mounting brackets: one with screw clamp for surface or grommet mount *1, one for a hole drilled on-site *2 (see images below).
Includes VESA mount with 75 mm and 100 mm configurations.
Allows portrait or landscape monitor layout.
Metal, Silver finish.
Installs with screw clamp on 1", 1 ½" and 2" thick surfaces (no back) or a "benching" type surface without cable tray or electrical system.
Installs with screw clamp through the grommet (including the grommet on a "benching" type surface with cable tray and / or electrical system).



	Code	Price	Spec	
			Cu.Ft.	lb
monitor arm for 1 monitor	AC-FSHDS1SX	899	1.0	6
monitor arm for 2 monitors	AC-FSHDS2SY	1679	1.0	10




IMPORTANT

Cannot be installed through the grommet on a 21" deep surface with pedestal.



Double extension monitor arm, surface mount - Technical specifications

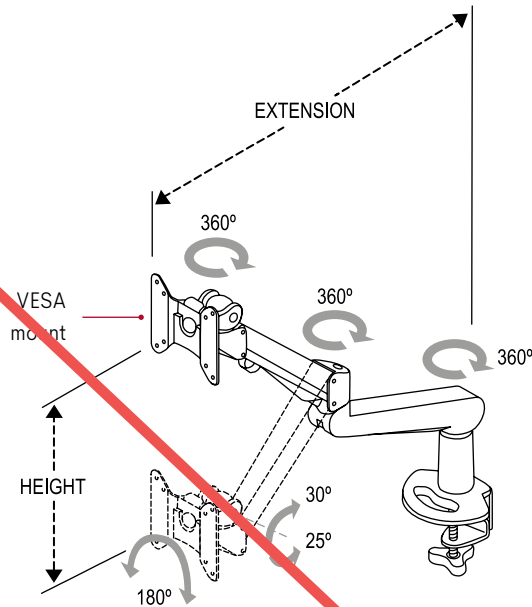

*1 Screw clamp for surface or grommet mount

A 6.6 lb to maximum 17.6 lb monitor can be installed per arm.

DYNAMIC ADJUSTMENTS

- Monitor extension: 21"
- Monitor retraction: 3 1/2" (for maximum available work surface)
- Arm height adjustment range: 6 1/2" - 19 1/2" (13" total)
- 360° swivelling arms with 180° lockout feature
- Monitor rotation: + 90° / - 90°
- Monitor tilts + 30° to - 25°





*2 Mount bracket for a hole drilled on-site



Cable management is integrated into the arm



Included mount allows quick release of monitor

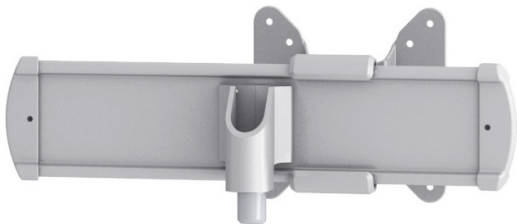

Conversion kit

Convert a monitor arm for 1 flat screen (**AC-FSHDS1SX**, [see p.55](#)), to a monitor arm for 2 flat screens.

This conversion kit includes:


- 1 surface or grommet mount screw clamp and 1 for a hole drilled on-site (images *1 and *2 on previous page);
- 1 monitor arm with double extension for 1 flat screen;
- 1 anchor to install the additional monitor arm with double extension (**AC-FSHDS1SX**).

Dynamic adjustments specifications, [see p.56](#).

Metal, Silver finish.



	Code	Price	Spec.	
			Cu.Ft.	lb
1 conversion kit	AC-FSHDS1AX	911	1.0	6

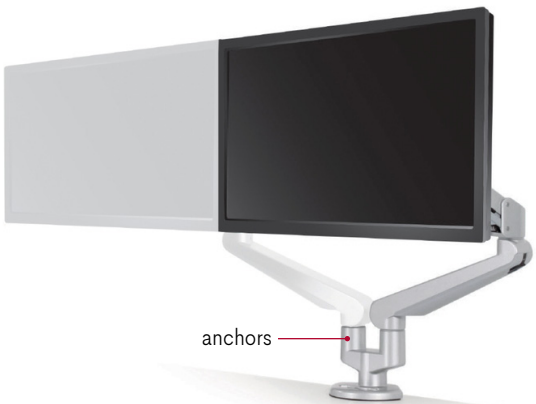


Slider mount

Installs on a monitor arm for 2 monitors (**AC-FSHDS2SX**, see p.69).

For placing 2 large monitors (32" diagonal) side-by-side. Up to 9" of adjustment from left to right.

Sold individually. Order 2 slider mounts for the double extension monitor arm **AC-FSHDS2SX**.

Metal, Silver finish.

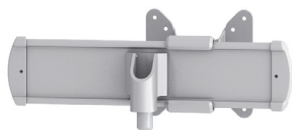


	Code	Price	Spec.	
			Cu.Ft.	lb
1 slider mount	AC-FSHSUP2S	359	0.2	2

Vesa plate

VESA plate measures 4 3/4" x 4 3/4" x 3/8" thick. 75 mm and 100 mm configurations.

For use when monitor weight does not meet minimum requirement (6,6 lb). Adds 2,39 lb.



	Code	Price	Spec.	
			Cu.Ft.	lb
1 VESA plate	AC-FSHVESA	119	0.1	3

Single extension monitor arm, pole mounted

Single extension pole mounted monitor arm for 1 or 2 flat screens. Dynamic adjustments: arm height, monitor extension, tilt and rotation. 18" H. pole. Includes two mounting brackets: one with screw clamp for surface or grommet mount *1, one for a hole drilled on-site *2 (see images below).

Monitor arm for 2 monitors: included slider mounts for placing 2 large monitors (32" diagonal) side-by-side. Up to 9" of adjustment from left to right. Includes VESA mount with 75 mm and 100 mm configurations. Allows portrait or landscape monitor layout. Metal, Silver finish.

Installs with screw clamp on 1", 1 1/2" and " thick surfaces (no back) or a "benching" type surface without cable tray or electrical system. Installs with screw clamp through the grommet (including the grommet on a "benching" type surface with cable tray and / or electrical system).




	Code	Price	Space	
			Cu.Ft.	lb
monitor arm for 1 monitor	AC-FSHDP1S	749	1.0	8
monitor arm for 2 monitors	AC-FSHDP2S	1980	1.0	11

IMPORTANT:
Cannot be installed through the grommet on a 21" deep surface with pedestal.



Single extension monitor arm, pole mounted - Technical specifications

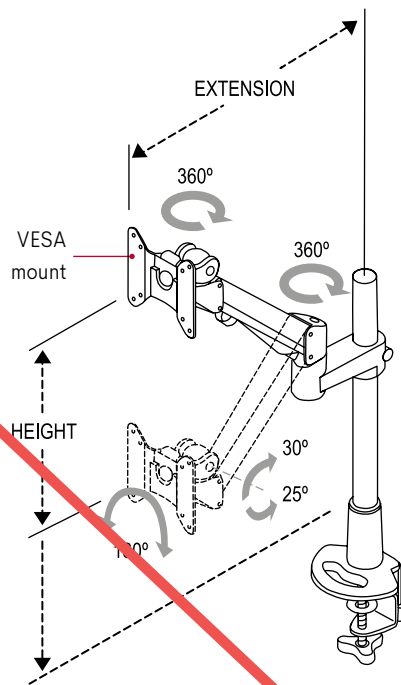

*1 Screw clamp for surface or grommet mount

Weight capacity:

- 6.6 lb to 17.6 lb per arm - monitor arm for 1 monitor
- 4.4 lb to 15.4 lb per arm - monitor arm for 2 monitors

DYNAMIC ADJUSTMENTS

- Monitor extension - monitor arm for 1 monitor: 16 1/4"
- Monitor extension - monitor arm for 2 monitors: 18 3/4"
- Monitor retraction: 3 1/2" (for maximum available work surface)
- Arm height adjustment range: 4 1/2" - 26 1/2"
- 360° swivelling arms with 180° lockout feature
- Monitor rotation: + 90° / - 90°
- Monitor tilts + 30° to - 25°



*2 Mount bracket for a hole drilled on-site



Cable management is integrated into the arm



Included mount allows quick release of monitor

Double extension monitor arm, pole mounted

Double extension pole mounted monitor arm for 1, 2 or 3 flat screens. Dynamic adjustments: arm height, monitor extension, tilt and rotation. 18" H. pole. Includes two mounting brackets: one with screw clamp for surface or grommet mount *1, one for a hole drilled on-site *2 (see images below).
Monitor arm for 2 or 3 monitors: included slider mounts for placing 2 or 3 large monitors (32" diagonal) side-by-side.
Up to 9" of adjustment from left to right.
Includes VESA mount with 75 mm and 100 mm configurations.
Allows portrait or landscape monitor layout.
Metal, Silver finish.

Installs with screw clamp on 1", 1 ½" and 2" thick surfaces (no back) or a "benching" type surface without cable tray or electrical system.
Installs with screw clamp through the grommet (including the grommet on a "benching" type surface with cable tray and / or electrical system).




	Code	Price	Spec	
			Eu.Ft.	lb
monitor arm for 1 monitor	AC-FSHDP1SX	1007	1.0	10
monitor arm for 2 monitors	AC-FSHDP2SX	2122	1.0	13
monitor arm for 3 monitors	AC-FSHDP3SX	2593	1.0	15



IMPORTANT:
Cannot be installed through the grommet on a 21" depth surface with pedestal.



Double extension monitor arm, pole mounted - Technical specifications

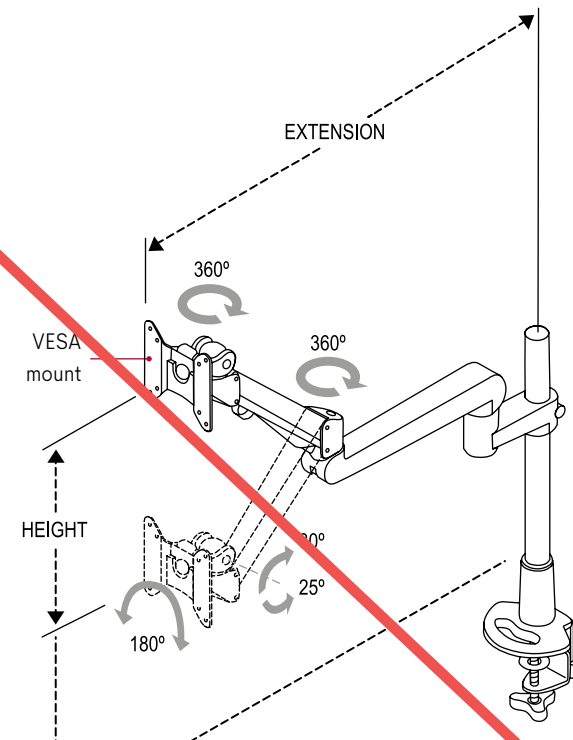

EXTENSION

360°

VESA mount

HEIGHT

180°

90°

25°


***1** Screw clamp for surface or grommet mount.

Weight capacity:

- 6.6 lb to 17.6 lb per arm - monitor arm for 1 monitor
- 4.4 lb to 15.1 lb per arm - monitor arm for 2 or 3 monitors

DYNAMIC ADJUSTMENTS


- Monitor extension - 1 monitor arm: 26 3/4"
- Monitor extension - 2 monitors arm: 28 3/4"
- Monitor extension - 3 monitors arm: 28 3/4" left/right monitor - 6" in the middle
- Monitor retraction: 3 1/2" (for maximum available work surface)
- Arm height adjustment range: 4 1/2" - 26 1/2"
- 360° swivelling arms with 180° lockout feature
- Monitor rotation: + 90° / - 90°
- Monitor tilts + 30° to - 25°



***2** Mount bracket for a hole drilled on-site



Cable management is integrated into the arm

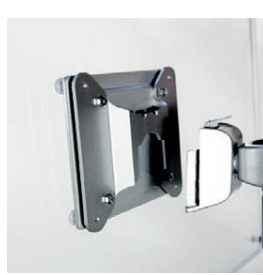

Included mount allows quick release of monitor

Single extension arm monitor, mounted on accessory bar

Single extension monitor arm for 1 flat screen.
Dynamic adjustments: arm height, monitor extension, tilt and rotation.
Bracket for mounting on accessory bar.
Includes VESA mount with 75 mm and 100 mm configurations.
Allows portrait or landscape monitor layout.
Metal, Silver finish.


Fits on Artopex 4" H. accessory bars.
For Artopex panels system, it is recommended to install the monitor arm at one end of the accessory bar (Uni-T, Take Off, Time).



	Code	Price	Spec.	
			Cu.Ft.	lb
monitor arm for 1 monitor	AC-FSHDA1S	906	0.4	4

IMPORTANT:
Cannot be installed on an accessory bar mounted on a work surface.

Technical specifications

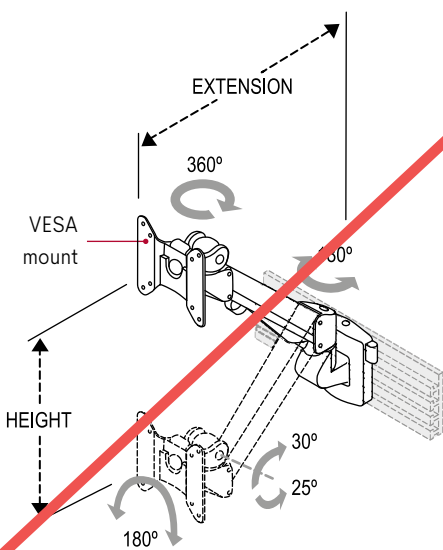

A 6.6 lb to maximum 17.6 lb monitor can be installed maximum on this monitor arm.

DYNAMIC ADJUSTMENTS

- Monitor extension: 10 ½"
- Monitor retraction: 3 ½" (for maximum available work surface)
- Arm height adjustment: 11 7/8" total
- Monitor rotation: + 90° / - 90°
- Monitor tilts + 30° to - 25°



Included mount allows quick release of monitor



Cable management is integrated into the arm


Double extension monitor arm, wall mounted

Double extension monitor arm for 1 flat screen.
Dynamic adjustments: arm height, monitor extension, tilt and rotation.
Installs on a vertical surface or a wall with screws, not included.
Includes VESA mount with 75 mm and 100 mm configurations.
Allows portrait or landscape monitor layout.
Metal, Silver finish.



	Code	Price	Spec.	
			Cu.Ft.	lb
monitor arm for 1 monitor	AC-FSHDW1SX	906	1.0	6

Technical specifications

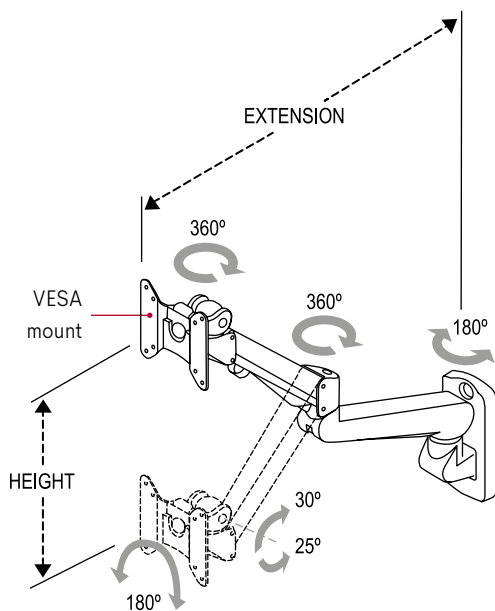

A 6.6 lb to maximum 17.6 lb monitor can be installed maximum on this monitor arm.

DYNAMIC ADJUSTMENTS

- Monitor extension: 19"
- Monitor retraction: 3 1/2" (for maximum available work surface)
- Arm height adjustment: 11 7/8" total
- Monitor rotation: + 90° / - 90°
- Monitor tilts + 30° to - 25°



Cable management is integrated into the arm



Included mount allows quick release of monitor

Update summary

Update summary

January 20th 2025

PAGES	SECTION	PRODUCT	MODIFICATION
			Overall price increase of 3% (some exceptions).

November 18th 2024

PAGES	SECTION	PRODUIT	MODIFICATION
p.15	Organization & Complements	Felt accessories	New product

Designing, manufacturing,
advising, planning and supporting:
that's the art that distinguishes
our purpose at Artopex.

ARTOPEX
Head Office
artopex.com

800 Vadnais Street
Granby, QC, Canada J2J 1A7
T 1 800 378 0189